

Design of MgB₂ superconducting dipole magnet for particle beam transport in accelerators

Abrahamsen, Asger Bech; Zangenberg, N.; Baurichter, A.; Grivel, Jean-Claude; Andersen, Niels Hessel

Publication date:
2006

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Abrahamsen, A. B., Zangenberg, N., Baurichter, A., Grivel, J-C., & Andersen, N. H. (2006). Design of MgB₂ superconducting dipole magnet for particle beam transport in accelerators. (Denmark. Forskningscenter Risoe. Risoe-R; No. 1578(EN)).

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Risø-R-1578(EN)

Design of MgB₂ superconducting dipole magnet for particle beam transport in accelerators

A.B. Abrahamsen, N. Zangenberg, A. Baurichter, J-C. Grivel
and N.H. Andersen

Author: A.B. Abrahamsen¹, N. Zangenberg², A. Baurichter², J-C. Grivel¹ and N.H. Andersen¹

Title: Design of MgB₂ superconducting dipole magnet for particle beam transport in accelerators

Department: Materials Research Department

¹Materials Research Department, Risø

²Danfysik A/S, Møllehaven 31, Jyllinge, Denmark

Abstract (max. 2000 char.):

A comprehensive analysis of the innovation potential of superconductivity at Risø was performed in February 2004 by the main author of this report [1]. Several suggestions for new products and new markets were formulated by the superconductivity group and examined by the innovation staff at Risø. The existing markets of superconducting technology is within highly specialized scientific areas such as magnetic confinement in fusion energy, sample environment in neutron scattering and large scale accelerators such as the Large Hadron Collider(LHC) at Cern, or in the nuclear magnetic resonance (NMR) community using MR-imaging scanners in medicine and phase identification in organic chemistry. Only the NMR applications can be categorized as a highly profitable and commercial market today. The superconductivity group of Risø formulated and presented the gearless superconducting wind turbine multipole generator as the most promising new concept [2], but further initiatives were stopped due to unclear patent possibilities. The experience of the innovation review was used in the STVF framework program "New superconductors: mechanisms, processes and products"[3] to identify potential new product for the collaborating company Danfysik A/S, which has a strong tradition in building resistive magnets for particle accelerators[4]. A technology transfer project was formulated at the end of 2005 with the purpose to collect the knowledge about the MgB₂ superconductor gained in the STVF program and in the European Framework Program 6 project HIPERMAG[5]. It was presented at the Risø innovation seminar January 2006, and recently a collaboration between Risø and Danfysik A/S was initialized. The present report aims to outline a potential superconducting product within the STVF program.

The use of the MgB₂ superconductors in a dipole magnet for guiding particle beams in a small scale accelerator is examined with the purpose to build lighter and smaller than the present resistive magnets. Here the critical current density of primarily MgB₂ will be compared with current density determined by specifications similar to the Tevatron accelerator, $B = 4.4$ Tesla and coil aperture $D = 76$ mm [6], which has been identified by Danfysik A/S as interesting.

It is concluded that MgB₂ is useful for the dipole application and construction of a small test coil of one half of the magnet is planned in 2007.

Risø-R-1578(EN)
November 2006

ISSN 0106-2840
ISBN 87-550-3555-8

Contract no.:

Group's own reg. no.:

Sponsorship:

Cover :

Pages: 15
Tables:
References: 15

Risø National Laboratory
Information Service Department
P.O.Box 49
DK-4000 Roskilde
Denmark
Telephone +45 46774004
bibl@risoe.dk
Fax +45 46774013
www.risoe.dk

Contents

1	Dipole magnets for small scale particle beam accelerators	4
2	$\cos(\theta)$ dipole geometry	4
2.1	Current calculation of $\cos \theta$ geometry	4
3	Intersecting ellipses geometry	5
4	Current densities of superconductor in dipole magnet	6
4.1	Circular cross section example	7
5	Current densities of commercial superconductors	7
5.1	Magnesium diboride MgB_2	8
5.2	$YBa_2Cu_3O_{6+x}$ coated conductor	10
5.3	$Bi_2Sr_2Ca_2Cu_3O_{10+x}$ (Bi2223) first generation HTS tape	10
5.4	$Nb - Ti$ Low Temperature Superconductor	12
6	Conclusion	12
	Acknowledgements	12

1 Dipole magnets for small scale particle beam accelerators

An increasing number of small scale accelerators are being produced and a range of interesting field and homogeneity limits of conventional resistive dipole magnets for particle beam transport were identified in a collaboration with Danfysik A/S[4].

The question is if the introduction of superconductor wire in the dipoles will make it possible to reach field strengths, which are considerably higher than the saturation field of soft iron used in normal resistive magnets. To clarify this a calculation of the needed current density of the superconductor in the coil will be performed and compared to the present performance of the MgB_2 superconducting wires or tapes and other commercially available superconductors.

As a starting point we will analyze the specifications of the Nb-Ti based dipoles of the Tevatron accelerator build at Fermilab in 1983 [6]:

- Field strength : $B_{max} = 4.4$ Tesla
- Diameter of homogenous field : $D_{homogen} = 0.076$ m

2 $\cos(\theta)$ dipole geometry

A homogenous dipole field can be generated in an infinitely long circular tube by realizing a current distribution at the surface given by a cosine function [6]:

$$I = I_0 \cos(\theta) \quad (1)$$

where I_0 is the surface current at $\theta = 0$ as indicated by the blue arrows on figure 1. The total current is $I_{tot} = 2I_0$.

This causes a homogenous analytical magnetic field in the interior of the tube

$$B(\theta) = \frac{\mu_0 I_0}{2r_0} \cos(\theta) \quad (2)$$

which in the xy coordinate system becomes

$$B_x = 0 \quad (3)$$

$$B_y = \frac{\mu_0 I_0}{2r_0} \quad (4)$$

where the vacuum permeability $\mu_0 = 4\pi \cdot 10^{-7} NA^{-2}$ and r_0 is the diameter of current tube.

2.1 Current calculation of $\cos \theta$ geometry

By inserting numbers one can calculate the maximum current I_0 at the surface needed to obtain the target field:

$$\begin{aligned} I_0 &= \frac{2r_0}{\mu_0} B \\ &= \frac{D_{homogen}}{\mu_0} B_{max} \\ &= \frac{0.076m}{4\pi \cdot 10^{-7} NA^{-2}} 4.4 NA^{-1} m^{-1} \\ &= 2.66 \cdot 10^5 A \end{aligned} \quad (5)$$

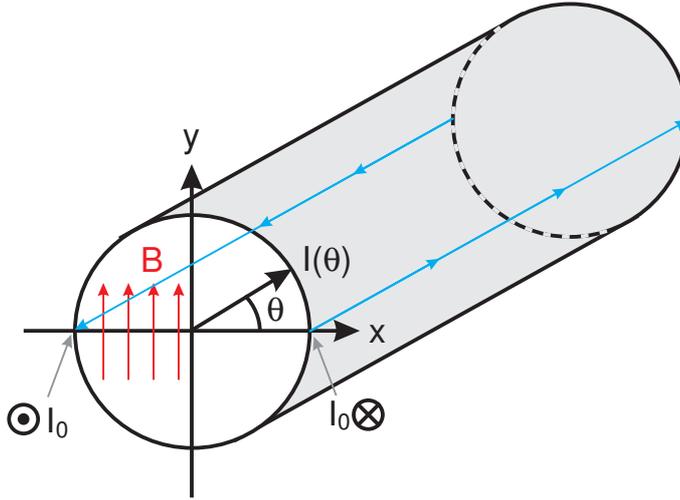


Figure 1. A homogenous dipole magnetic field B can be created inside a tube by realizing a current distribution at the surface given as $I(\theta) = I_0 \cos(\theta)$. The blue arrows indicates the path of I_0 at both sides of the tube.

Note that $[B] = \text{Tesla} = \text{NA}^{-1}\text{m}^{-1}$ and the the vacuum permeability is given by $\mu_0 = 4\pi \cdot 10^{-7} \text{NA}^{-2}$. The above formula does not take into account the dimensions of the current carrying region and one might violate the assumption that I_0 is distributed as a surface current. Thus a more realistic description is needed.

3 Intersecting ellipses geometry

An alternative analytical solution that creates a homogenous field inside the beam tube is realized by intersecting two elliptically shaped conductors as illustrated on figure 2 [6, 7, 8]. The field distribution of one ellipse is:

$$\begin{aligned} \mathbf{B} &= B_x \hat{x} + B_y \hat{y} \\ &= -\frac{\mu_0 J}{a+b} a y \hat{x} + \frac{\mu_0 J}{a+b} b x \hat{y} \end{aligned} \quad (6)$$

where a and b are the major and minor axis of the ellipse centered at the origin, μ_0 is the vacuum permeability, J is the current density pointing out of the paper, x and y are the coordinate inside the conductor and \hat{x} and \hat{y} are unit vectors of the coordinate system. One can confirm the known result for a circular conductor by setting $a = b$.

The field distribution of two intersecting ellipses can be calculated from vector addition of equation 6 giving :

$$\begin{aligned} \mathbf{B} &= \mathbf{B}_{\text{left}} + \mathbf{B}_{\text{right}} \\ &= -\frac{\mu_0 J}{a+b} a y \hat{x} + \frac{\mu_0 J}{a+b} b(x+s) \hat{y} \\ &\quad + \left(-\frac{\mu_0(-J)}{a+b} a y \hat{x} + \frac{\mu_0(-J)}{a+b} b(x-s) \hat{y} \right) \\ &= 0 \hat{x} + \mu_0 J \frac{2bs}{a+b} \hat{y} \end{aligned} \quad (7)$$

where s denotes the center position at $x = \pm s$ of the two ellipses and all other parameters are defined as above.

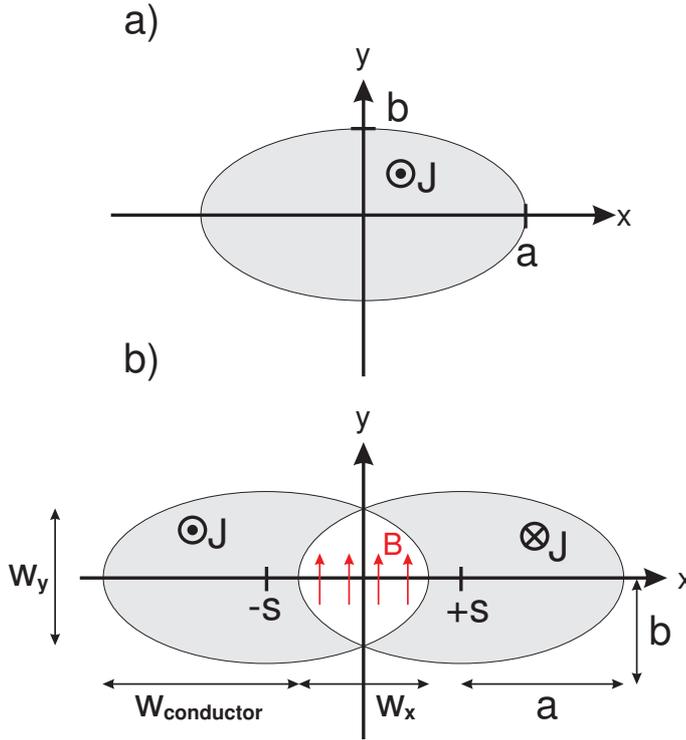


Figure 2. a) A homogenous current density J inside an elliptical conductor with major and minor axis given by a and b causes a field distribution given by equation 6. b) A homogenous dipole field B along the y -axis is created in between two intersecting elliptical conductors separated by $\pm s$ and with opposite current direction. The opening along the x - and y -axis inside the dipole are denoted w_x and w_y and the thickness of the conductor region along the x -axis is $w_{conductor}$.

4 Current densities of superconductor in dipole magnet

In order to calculate the current density needed to fulfil the field strength one should first work out the approximative dimensions. The opening inside the two ellipses along the x -axis is given by

$$\begin{aligned} w_x &= -s + a - (s - a) \\ &= 2(a - s) \end{aligned} \quad (8)$$

The opening w_y along the y -axis is most easily found from the parameter description of an ellipse

$$\left(\frac{x - x_0}{a}\right)^2 + \left(\frac{y - y_0}{b}\right)^2 = 1 \quad (9)$$

where the center of the ellipse is at (x_0, y_0) and the major and minor axis are a and b . w_y is found by inserting $(x_0, y_0) = (s, 0)$ and $x = 0$, which gives

$$w_y = 2y = 2b\sqrt{1 - \left(\frac{s}{a}\right)^2} \quad (10)$$

The conductor thickness along the x-axis is given by

$$\begin{aligned} w_{conductor} &= s + a - (-s + a) \\ &= 2s \end{aligned} \quad (11)$$

which is just the distance between the two ellipse centers.

4.1 Circular cross section example

A circular cross section will be assumed in the following example to simplify the calculations, $a = b$. By making the following assumption:

- $w_x = 0.076$ m
- $a = 0.0475$ m

we can calculate the displacement of the circle

$$s = \frac{2a - w_x}{2} = \frac{0.095m - 0.076m}{2} = 0.0095m \quad (12)$$

and the opening along the y-axis

$$w_y = 2b\sqrt{1 - \left(\frac{s}{a}\right)^2} = 2 \cdot 0.0475m\sqrt{1 - \left(\frac{0.0095m}{0.0475m}\right)^2} = 0.093m \quad (13)$$

The conductor thickness along the x-axis becomes

$$w_{conductor} = 2s = 2 \cdot 0.0095m = 0.019m \quad (14)$$

Now the current density can easily be calculated by inverting equation 7

$$\begin{aligned} B &= \mu_0 J \frac{2a}{2a} s \implies \\ J &= \frac{B}{\mu_0 s} \\ &= \frac{4.4\text{Tesla}}{4\pi \cdot 10^{-7} \text{NA}^{-2} \cdot 0.0095m} \\ &= 3.7 \cdot 10^4 \text{Acm}^{-2} \end{aligned} \quad (15)$$

The example calculation above is illustrated on figure 3.

5 Current densities of commercial superconductors

In the following the critical current density of various commercial superconductors are presented. It should be noted some of the superconductors such as the MgB_2 and coated conductors are still not developed to fulfil their full potential and both price and availability must be examined in more detail.

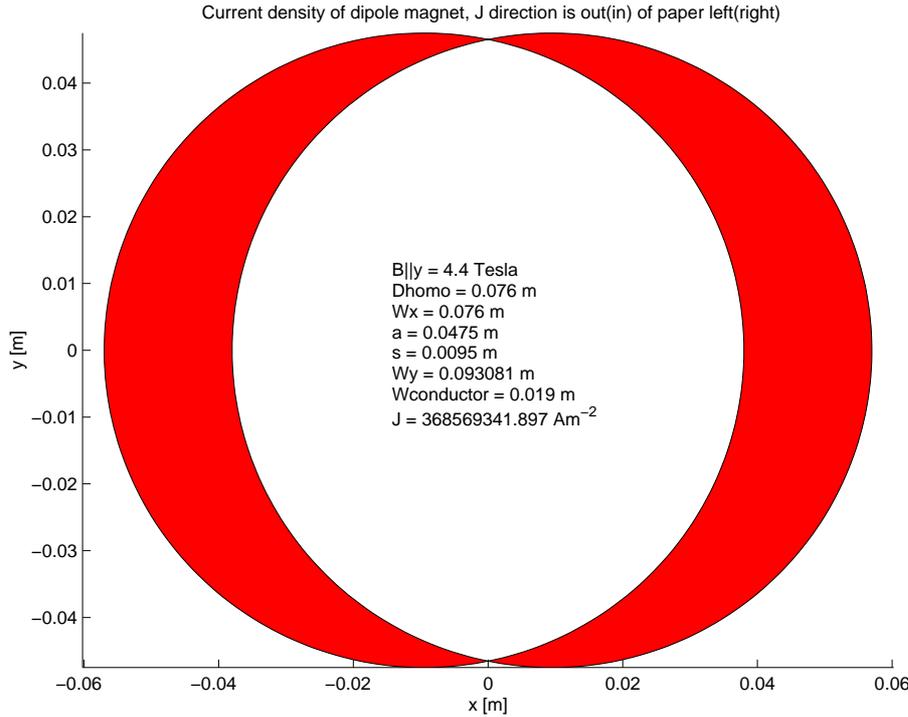


Figure 3. Example of intersecting circle geometry to create $B = 4.4$ Tesla by having a current density of $J = 3.7 \cdot 10^4 \text{ Acm}^{-2}$ flowing in the colored regions. The circles have a radius of $a = 0.0475 \text{ m}$. Given the opening along the x -axis $w_x = 0.076 \text{ m}$ one can determine the center displacement of the circles to $s = 0.0095 \text{ m}$ and $w_y = 0.093 \text{ m}$. The thickness of the conductor region becomes $W_{\text{conductor}} = 0.019 \text{ m}$. The unit of the figure scale is m .

5.1 Magnesium diboride MgB_2

Figure 4 shows a plot of the critical current density J_c of the MgB_2 superconductor as function of field. The superconductor is produced by the company Columbus Superconductors and the values corresponding to step 3 will be implemented at the end of the year 2006 [9]. J_c is expected to reach $J_c = 1.5 \cdot 10^5 \text{ Acm}^{-2}$ at $T = 4.2 \text{ K}$ and $B = 4 \text{ Tesla}$. Thus the critical current density of the MgB_2 wire exceeds the target current density by approximately a factor of 4 at $B = 4 \text{ Tesla}$ and this indicate that MgB_2 might be quite useful for the dipole application. However the most important information is the engineering critical current density J_e , which includes the non superconducting matrix around the MgB_2 in the calculation of the critical current density. According to G. Grasso then Columbus will be able to alter the geometry of the wires to obtain the needed J_e [9]. Figure 5 shows a cross section of a prototype multifilament wire with a filling factor of $f = 30\%$ and the engineering critical current density is expected to be

$$\begin{aligned}
 J_e &= J_c \cdot f \\
 &= 1.5 \cdot 10^5 \text{ Acm}^{-2} \cdot 0.3 \\
 &= 4.5 \cdot 10^4 \text{ Acm}^{-2}
 \end{aligned} \tag{16}$$

whereby the target current density will be at 82 % of the limit of the wire at $T = 4.2 \text{ K}$ and $B = 4.4 \text{ Tesla}$. Usually the loadline is positioned at 90 % of the critical current density. A reduction of 30 % of the critical current density is expected if the operation temperature is increased to $T = 10 \text{ K}$ instead of $T = 4.2 \text{ K}$.

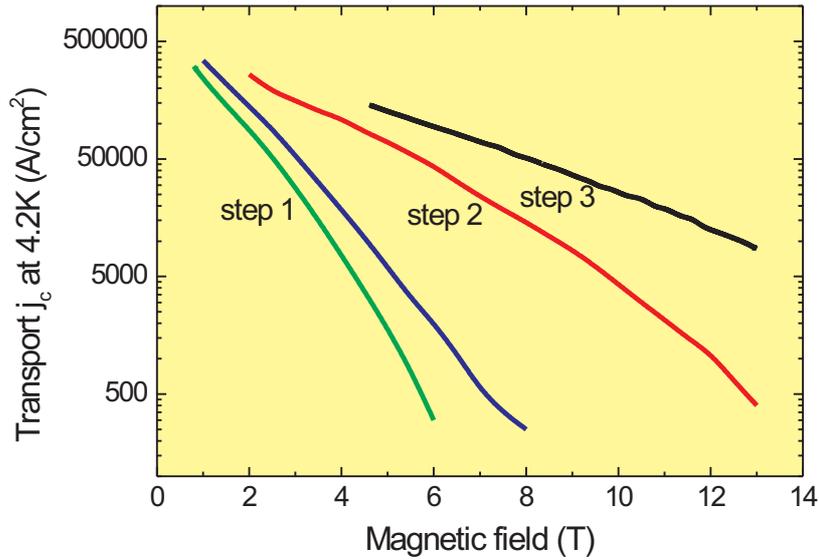


Figure 4. Critical current density of MgB_2 tapes from Columbus Superconductors. Step 3 values will be implemented in the production line at the end of 2006 [9].

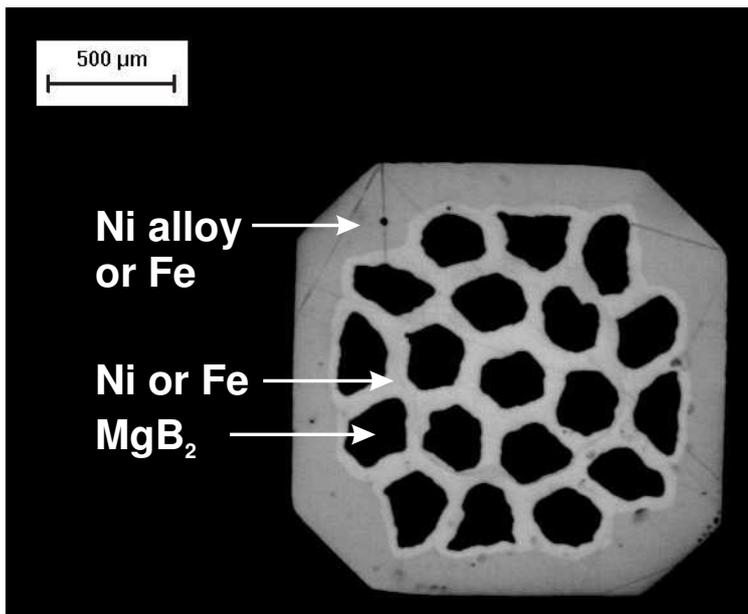



Figure 5. Cross section of prototype multifilament MgB_2 wire from Columbus superconductors with filling factor of 30 %. The dark MgB_2 filaments are surrounded by Ni or Fe and the outer wall is made of Ni alloy or Fe [9].

Figure 6 shows the specifications of the MgB_2 wire from Hyper Tech Research in Ohio, USA. It is seen that the critical current density exceeds that target value from the calculations above $J_c = 10^5 Acm^{-2}$ at $T = 10 K$ and $B = 4$ Tesla, but the engineering critical current density is only $J_e = 2.2 \cdot 10^4 Acm^{-2}$ even at $T = 4.2 K$ and $B = 4$ Tesla. Thus an alternative geometry of the wires is needed to obtain sufficient J_e .

Typical Wire Specifications

(1 to 4 kilometer lengths are available
with 7 and 19 filaments)

Diameter	0.7 mm to 0.9 mm (others available)
Number of Filaments	7 and 19 (higher available experimentally)
Condition	Reacted and un-reacted and insulated with S-glass
Heat Treatment Temperature/Time	700°C / 20 minutes (Nominal)
J_c @ 20 K – 2T	175,000 A/cm ² (Nominal)
Maximum Allowable Axial Strain	0.35%
Continuous Piece Length	1-4 km
Superconductor fraction	13 – 18% (Under development - increase to 30%)

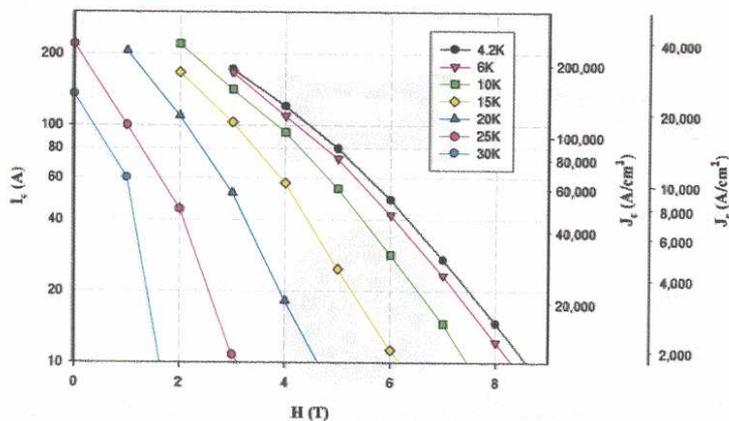

Typical I_c , J_c and J_c versus H at various temperatures for
0.84 millimeter diameter 19 filament wire

Figure 6. Critical current density of MgB_2 wire from HyperTech Research Inc. [10]

5.2 $YBa_2Cu_3O_{6+x}$ coated conductor

Figure 7 shows a plot of the upper critical field of the second generation(2G) High Temperature Superconductor(HTS) tape produced by SuperPower. These new tapes will have $J_c = 10^5 Acm^{-2}$ at $H = 4$ tesla and $T = 77$ K, which sound extremely promising, but the delivery and price might be a problem at present. August 2006 prices of coated conductor are around 100 US\$ per meter.

5.3 $Bi_2Sr_2Ca_2Cu_3O_{10+x}$ (Bi2223) first generation HTS tape

Figure 8 and 9 shows the critical current density of the Bi2223 tape from American Superconductors with both the field perpendicular and parallel to the Cu-O planes of the superconductor. It is important to note that Bi2223 is from a fundamental

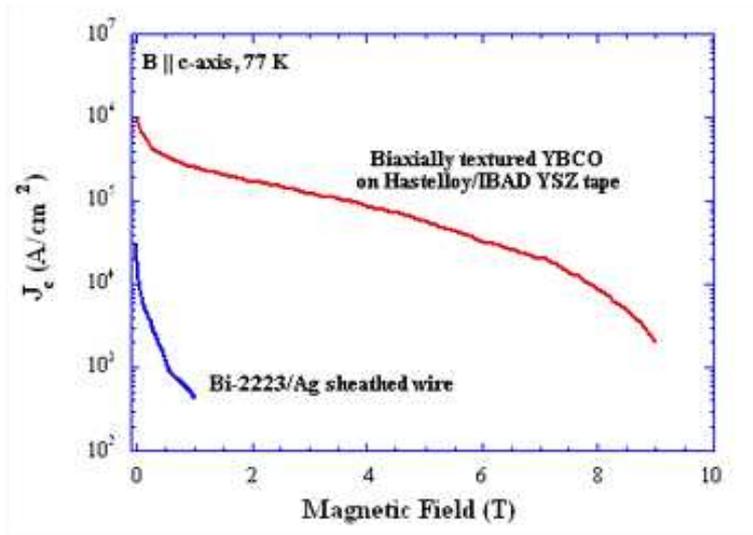


Figure 7. Critical current density of second generation(2G) High Temperature Superconductor (HTS) $YBa_2Cu_3O_{6+x}$ coated conductor tape from SuperPower [11].

point of view quite limited in the operation in magnetic field at $T = 77$ K. This is seen in the engineering critical current densities $J_e = 2.4 \cdot 10^4 \text{ Acm}^{-2}$ when $B \parallel c = 4$ Tesla and $J_e = 3.9 \cdot 10^4 \text{ Acm}^{-2}$ when $B \parallel ab = 4$ Tesla. Thus Bi2223 must be cooled to $T = 10$ K to support the current density of the dipole magnet specified in this note.

It should be noted that Bi2212 wires from Nexans [13] ($J_e = 4.5 \cdot 10^4 \text{ Acm}^{-2}$ when $B = 20$ Tesla and $J_e = 9.1 \cdot 10^4 \text{ Acm}^{-2}$ when $B = 0$ Tesla both when $T = 4.2$ K) and Bi2223 from Sumitomo [14] should be checked before final conclusion can be made on the Bi-family conductors.

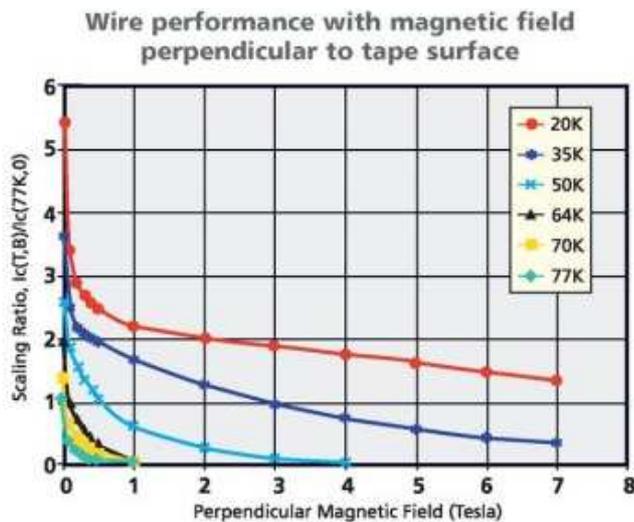


Figure 8. Engineering critical current density of first generation HTS Bi2223 tape from American Superconductors when $H \parallel c$. The reference is $J_e = 1.07 - 1.33 \cdot 10^4 \text{ Acm}^{-2}$ at $T = 77$ K and $H = 0$ Tesla [12].

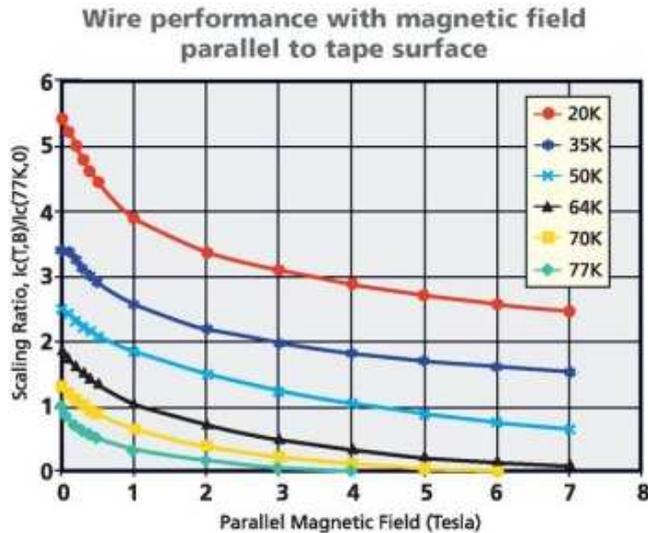


Figure 9. Engineering critical current density of first generation HTS Bi2223 tape from American Superconductors when $H \parallel ab$. The reference is $J_e = 1.07 - 1.33 \cdot 10^4 \text{ Acm}^{-2}$ at $T = 77 \text{ K}$ and $H = 0 \text{ Tesla}$ [12].

5.4 Nb – Ti Low Temperature Superconductor

A Nb-Ti Superconductor was found on the home-page of Luvata [15] and a Nb-Ti wire with 552 filaments will have a critical current density of $J_c = 3.3 \cdot 10^5 \text{ Acm}^{-2}$ at $T = 4.2 \text{ K}$ and in a field of $H = 5 \text{ Tesla}$.

6 Conclusion

It is concluded that MgB_2 is a promising candidate as superconductor material for dipole accelerator magnets, since the critical current density exceeds the target current density at $T = 4.2 \text{ K}$ outlines in this report. However Nb-Ti is much better at $T = 4.2 \text{ K}$, but the critical temperature of Nb-Ti $T_c = 9.5 \text{ K}$ is exceeded at 10 K , which is the really interesting operation temperature, because it can be obtained by modern cryo-coolers. The construction of a small MgB_2 superconducting test coil of one half of the magnet seems quite possible and this will be done in 2007 as part of the fulfilment of the STFV framework program "Nye superledere: mekanismer, prosesser og produkter". The second generation YBCO coated conductors may be very useful for future dipole magnets operating at $T = 77 \text{ K}$, but most like at a higher production cost than the MgB_2 based ones.

Acknowledgements

This work was supported by the Danish Technical Research Council under the Framework Programme on Superconductivity. The authors would like to thank Gianni Grasso for sharing information about the MgB_2 conductors under current development at Columbus Superconductors.

References

- [1] A.B. Abrahamsen *Review presentation handed out on request* (Power Point Presentation)
- [2] A.B. Abrahamsen and N.H. Andersen *Multipole superconducting windturbine generator* (Invention Disclosure Form filed as case p481 at Risø)
- [3] "Nye superledere: mekanismer, processer og produkter" *STVF homepage* (http://forsk.dk/portal/page/pr04/FIST/FORSIDE/FOER_010205/STATENS_TEKNISKVIDENSKABELIGE_FORSKNINGSRAAD/FONDSFUNKTIONEN_I_TAL_STVF/BEV_2001)
- [4] Danfysik A/S *homepage* (www.danfysik.dk)
- [5] FP6 EU project HIPERMAG *homepage* (<http://lt.tnw.utwente.nl/research/HCS/Projects/HIPERMAG/>)
- [6] Haus Rissen *Superconductivity in particle Accelerators* (Cern Accelerator school 1996, ISBN 92-9083-084-0)
- [7] R.A. Beth *An integral formula for two dimensional fields* (Jour.Appl.Phys. **38**, 4689(1967))
- [8] R.A. Beth *Current and coil forces as countour integrals in two dimensional Magnetic fields* (Jour.Appl.Phys. **40**, 2445(1969))
- [9] G. Grasso *Private communication* (Columbus superconductors, Genova, Italy, <http://www.columbussuperconductors.com/>)
- [10] HyperTech Research Inc. *Information from ASC 2006 Conference* (www.hypertechresearch.com)
- [11] SuperPower Inc. *InterMagnetics homepage* (www.intermagnetics.net/SuperPower/Programs.aspx)
- [12] American Superconductors Inc. *homepage* (www.amsuper.com/products/htsWire/103419093341.cfm)
- [13] Nexans Inc. *homepage* (www.nexans.com/internet/Navigate.nx?id=1015)
- [14] Sumitomo Inc. *homepage* (www.sumitomoelectricusa.com/scripts/products/scc/)
- [15] Luvata *homepage* (www.luvata.com)

Risø's research is aimed at solving concrete problems in the society.

Research targets are set through continuous dialogue with business, the political system and researchers.

The effects of our research are sustainable energy supply and new technology for the health sector.