



## Application of the MCNPX-McStas interface for shielding calculations and guide design at ESS

**Klinkby, Esben Bryndt; Willendrup, Peter Kjær; Bergbäck Knudsen, Erik; Lauritzen, Bent; Nonbøl, Erik; Bentley, Philip; Filges, Uwe**

*Publication date:*  
2013

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Klinkby, E. B., Willendrup, P. K., Bergbäck Knudsen, E., Lauritzen, B., Nonbøl, E., Bentley, P., & Filges, U. (2013). Application of the MCNPX-McStas interface for shielding calculations and guide design at ESS [Sound/Visual production (digital)]. International Workshop on Neutron Optics and Detectors , Ismaning, Germany, 02/07/2013

## DTU Library

Technical Information Center of Denmark

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Application of the MCNPX-McStas interface for shielding calculations and guide design at ESS

**Esben KLINKBY<sup>1,3)</sup>,**

Peter Kjær WILLENDRUP<sup>2,3)</sup>, Erik Bergbäck KNUDSEN <sup>2,3)</sup>, Bent LAURITZEN<sup>1,3)</sup>,  
Erik NONBØL<sup>1,3)</sup>, Phillip BENTLEY<sup>4)</sup>, Uwe FILGES<sup>5)</sup>

1) DTU Nutech, Box 49, 4000 Roskilde, Denmark

2) DTU Physics, Fysikvej 307-312, 2800 Kgs. Lyngby, Denmark

3) ESS design update programme, Denmark

4) European Spallation Source ESS AB, Box 176,S-221 00 Lund, Sweden

5) Paul Scherrer Institut, 5232 Villigen, Switzerland. ESS design update programme, Switzerland

# Motivation

- ESS will be a long pulse spallation source and deliver neutrons to 22 instruments located ~20-200m from the target station



- Guide demands are unprecedented

*BUT...*

- Guides & shielding is expensive!
- Useful to have a tool that:
  - can monitor where in a guide neutrons are lost
  - allows to optimize reflectivity requirements along a guide
  - serves as an input for dose-rate calculations along guide ( $n, \gamma$ )
  - works within the work-flow accustomed to instrument designers (McStas)
- **McStas Scatterlogger** is the backbone that facilitates this usage



# Scatterlogger: Implementation & usage


- At each scattering, for any McStas component (eg. a guide), the incoming and outgoing neutron state can be temporally stored & analyzed

At each scattering:

Incoming state:  $n_{in} = (\vec{x}, \vec{v}_{in}, t, w_{in})$


Transmitted state:  $n_{trans} = (\vec{x}, \vec{v}_{in}, t, w_{trans})$

Reflected state:  $n_{refl} = (\vec{x}, \vec{v}_{out}, t, w_{in} - w_{itrans})$

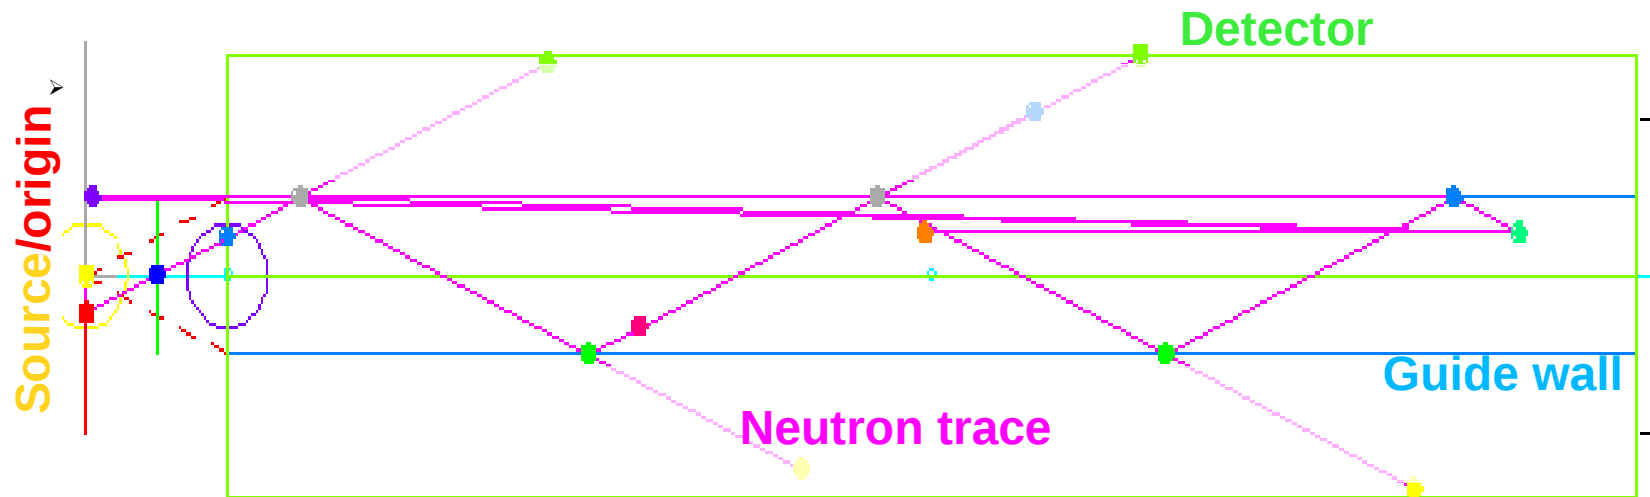

# Example1: Lost intensity



- Lost intensity along guide:  $w_{\text{trans}}$  versus  $\vec{x} \cdot \hat{z}$

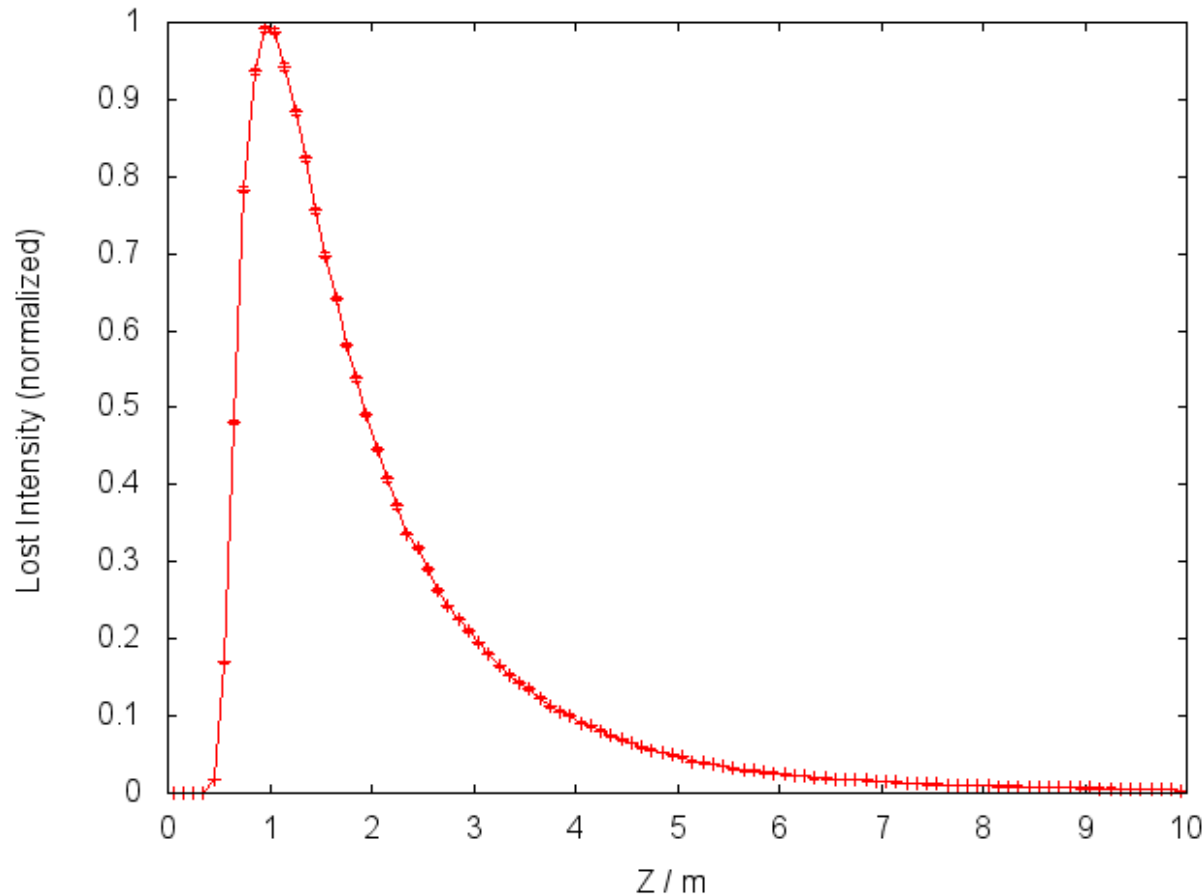

- Depends strongly on specific guide design, and incoming neutrons (i.e. source) spectrum and divergence.

# Example2: Reflectivity

- Neutrons are reflected if the energy/incident angle is low enough

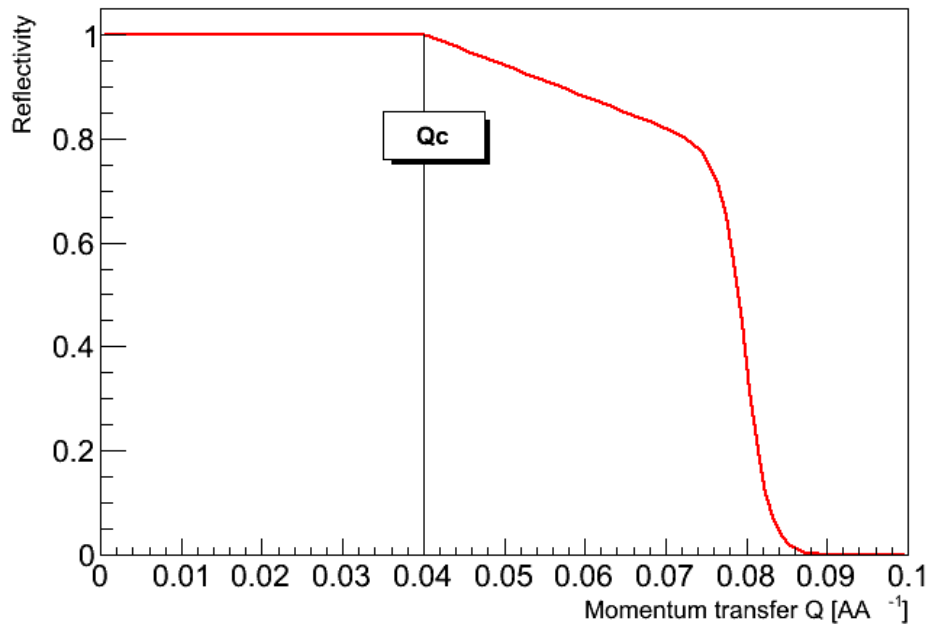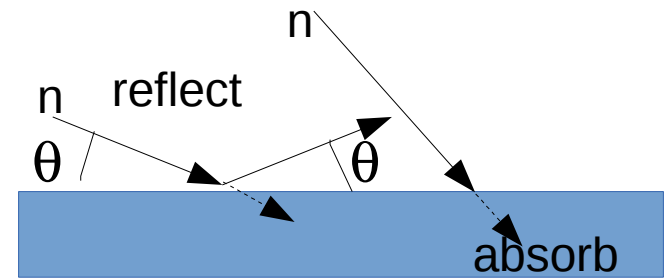

$$\cos 2\theta = (\vec{v}_{in} \cdot \vec{v}_{out}) / |\vec{v}_{in}|^2$$

$$k = |\vec{v}_{in}| \cdot m_n / \hbar$$


$$\Downarrow$$

$$m_{min} = 2 \cdot k \cdot \sin(\theta) / 0.0219$$


- Given a neutron state and a guide geometry,  $m_{min}$  can be calculated at a scattering: The minimum mirror reflectivity requirement which would reflect the neutron without loss

# Example2: Reflectivity



Impinging intensity - 1st reflection

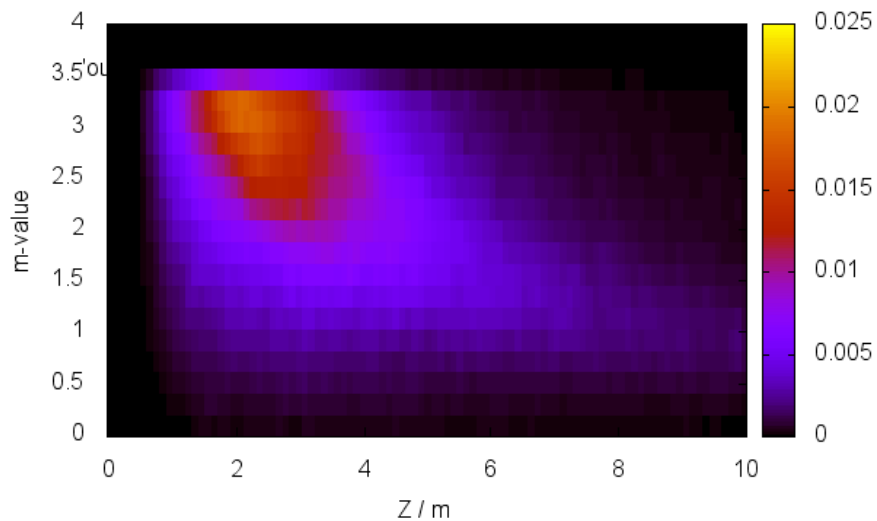

Impinging intensity - 2nd reflection

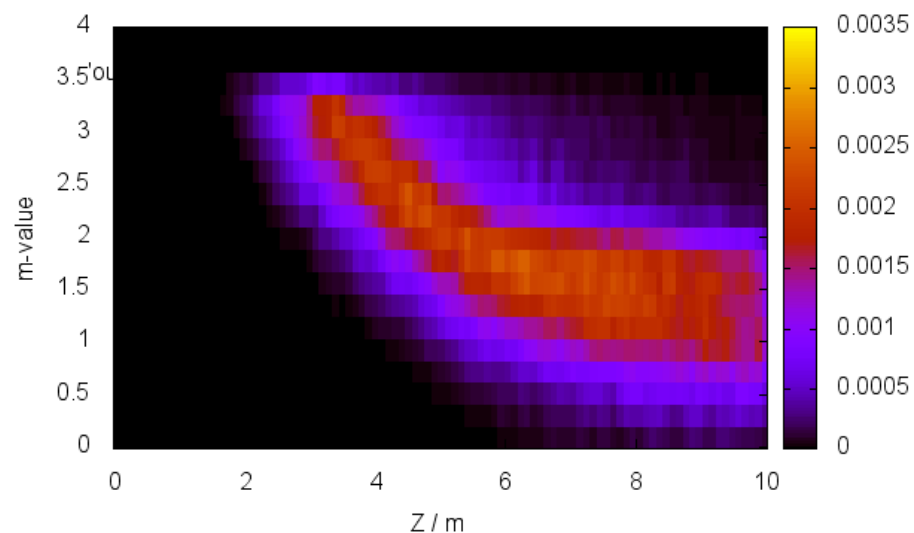


Impinging intensity - 3rd reflection

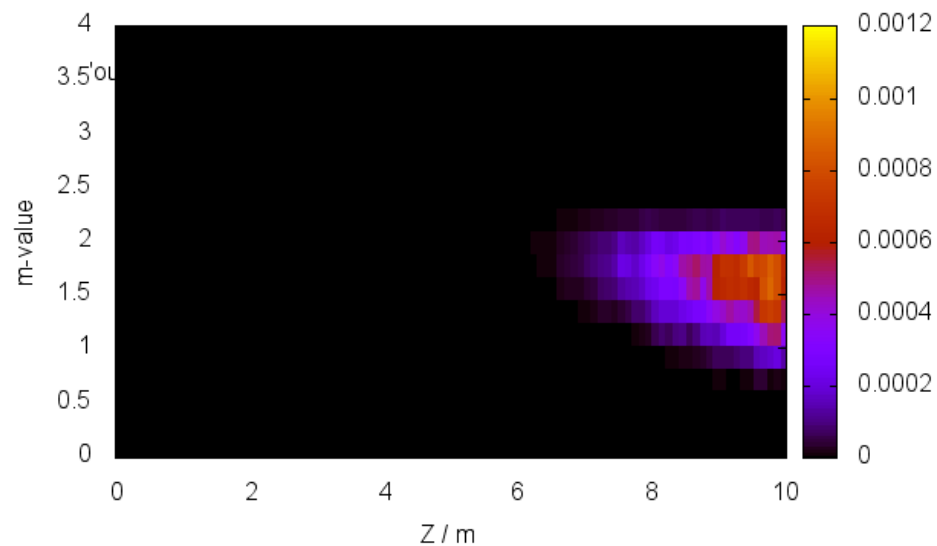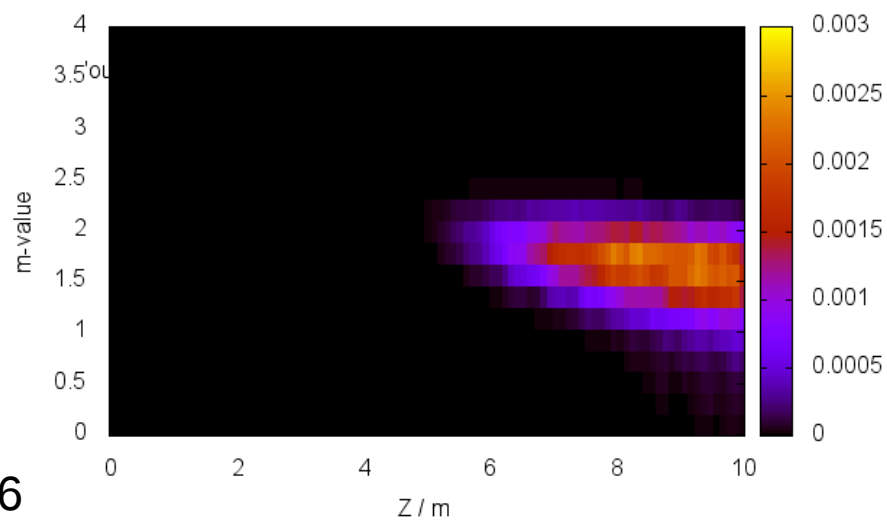

# Example3: Background along guide

- I. Neutrons generated with MCNPX
- II. Handed to McStas through SSW interface [1]
- III. Unreflected neutrons returned to MCNPX for dose-rate calculation

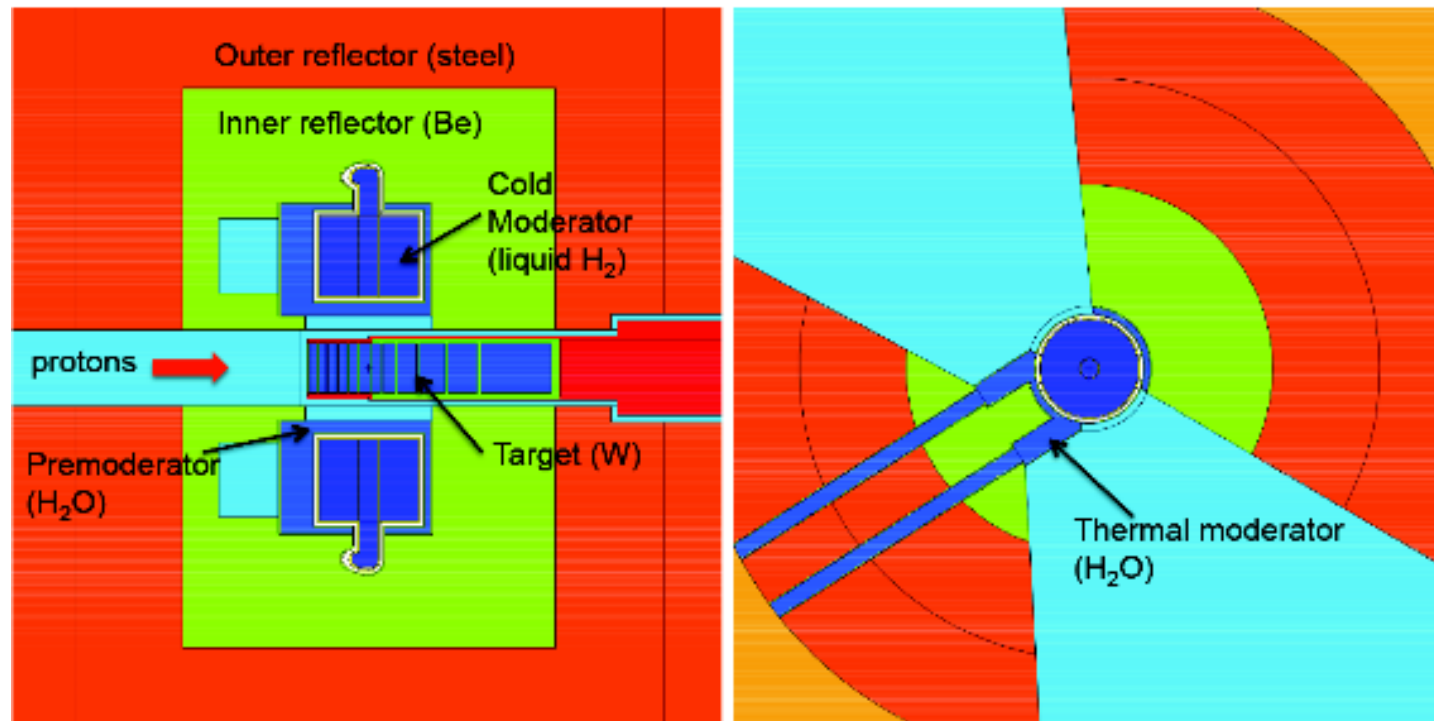




# Example3: Background along guide

I. Neutrons generated with MCNPX

→ II. Handed to McStas through SSW interface [1]

III. Unreflected neutrons returned to MCNPX for dose-rate calculation

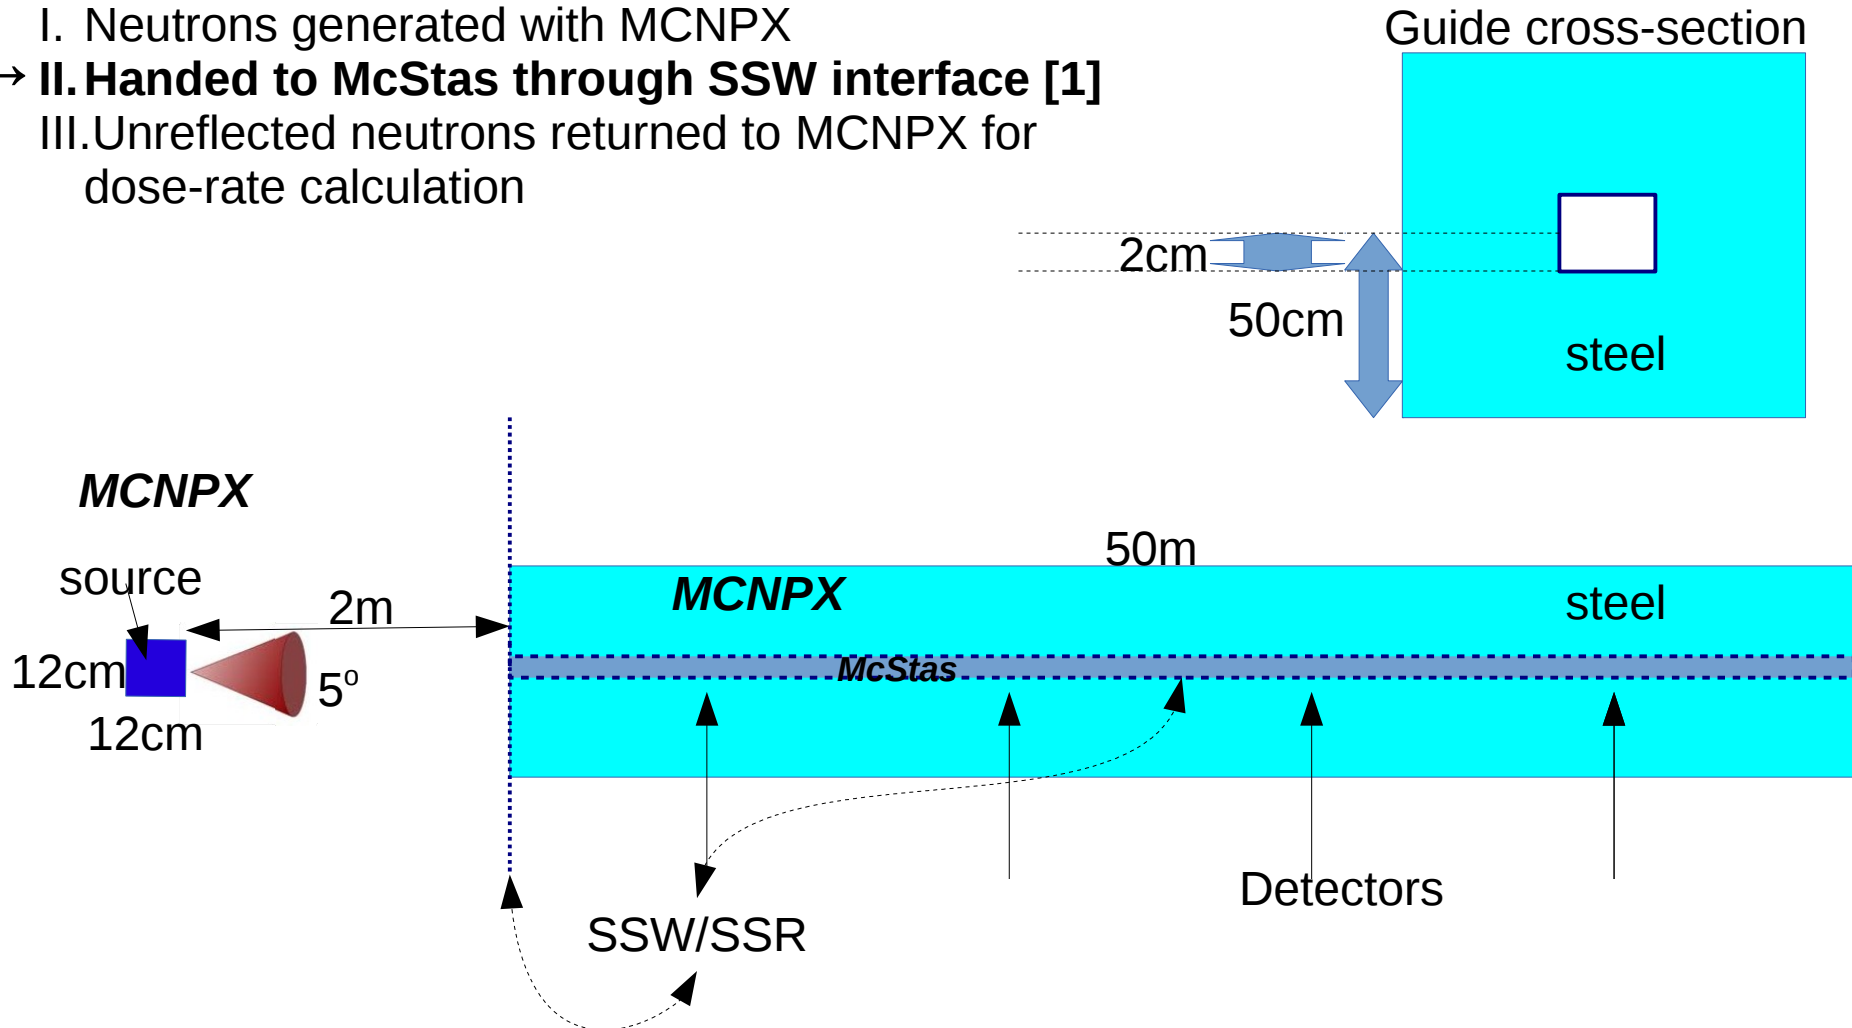

# Example3: Background along guide

I. Neutrons generated with MCNPX

II. Handed to McStas through SSW interface [1]


→ III. **Unreflected neutrons returned to MCNPX for dose-rate calculation**

*At each scattering:*

Incomming state:  $n_{in} = (\mathbf{x}, \mathbf{v}_{in}, t, w_{in})$

Transmitted state:  $n_{trans} = (\vec{\mathbf{x}}, \vec{\mathbf{v}}_{in}, t, w_{trans})$


Reflected state:  $n_{refl} = (\vec{\mathbf{x}}, \vec{\mathbf{v}}_{out}, t, w_{in} - w_{itrans})$

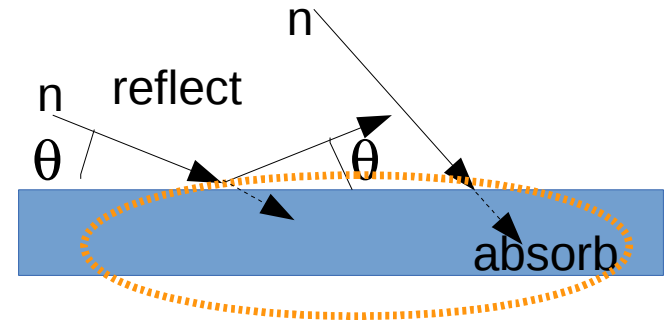



>

# Example3: Background along guide

- I. Neutrons generated with MCNPX
- II. Handed to McStas through SSW interface [1]
- III. **Unreflected neutrons returned to MCNPX for dose-rate calculation**

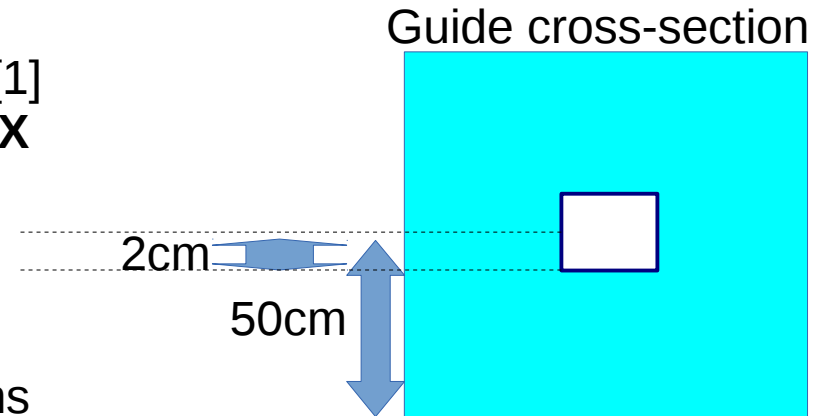


Guide end overilluminated by energetic neutrons

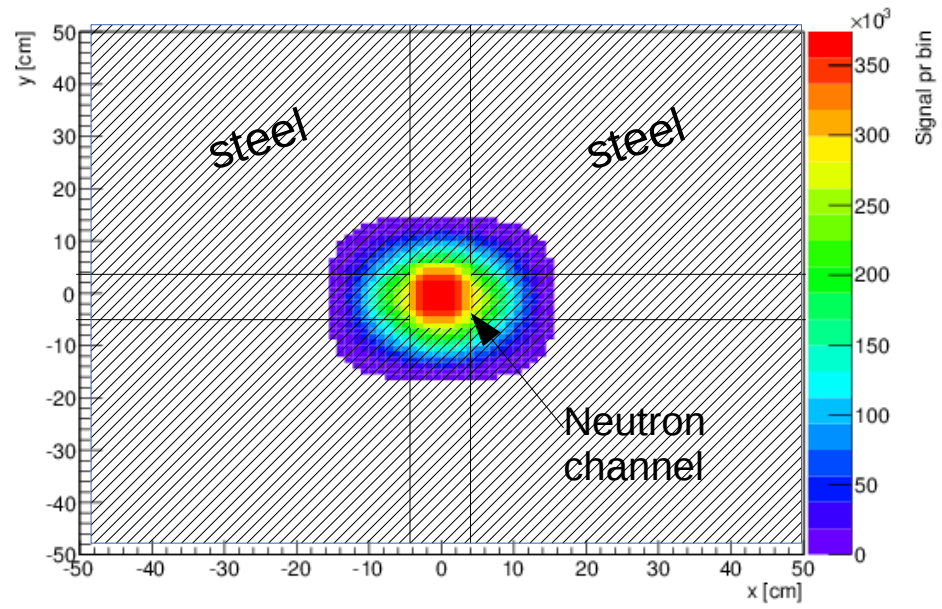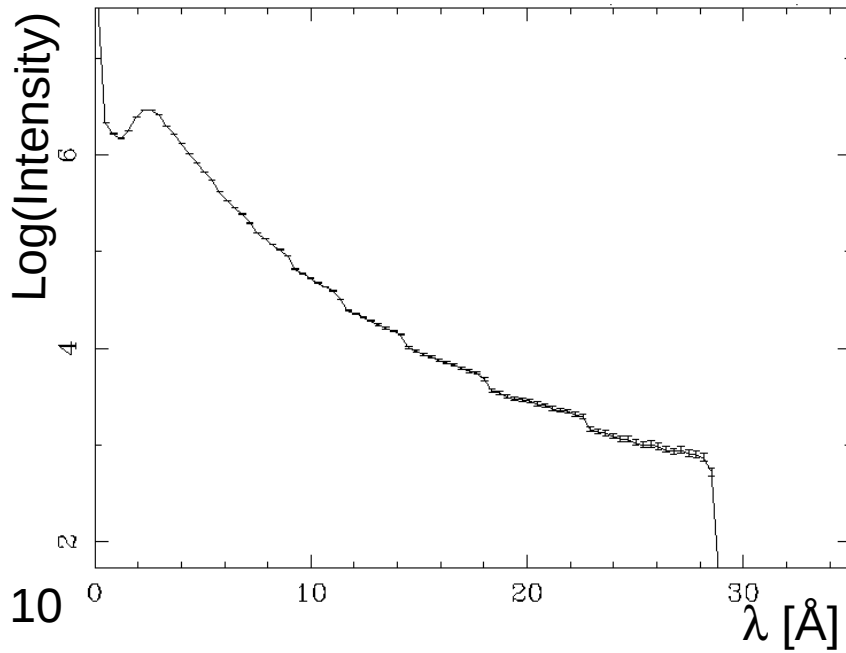


# Example3: Background along guide

Straight guide

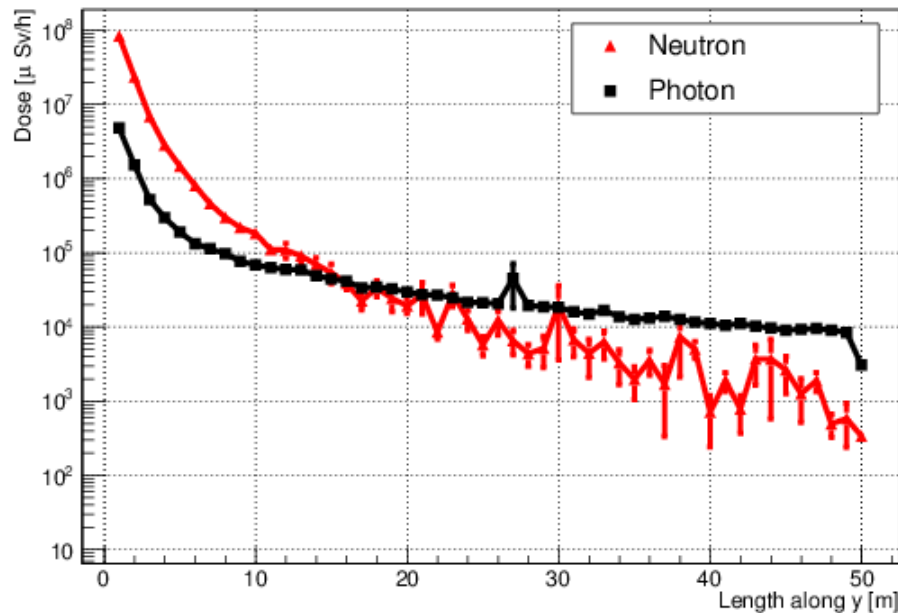

Curved guide ( $r_{\text{curvature}} = 1500\text{m}$ )

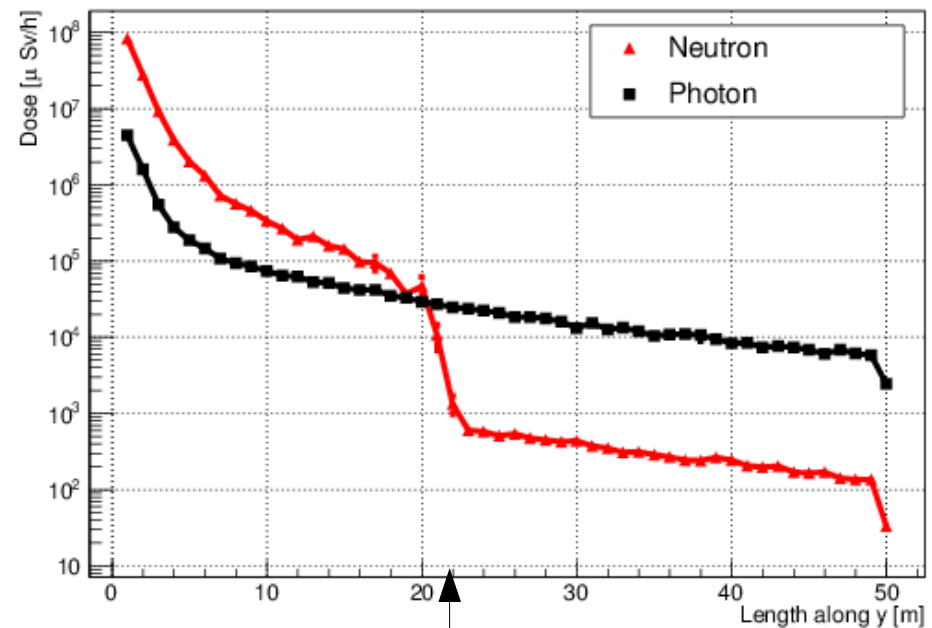


Line-of-sight lost


- Dose-rates, measured 5cm in the steel converted from flux according to official Swedish radiation protection procedures

# Example3: Background along guide

Straight guide

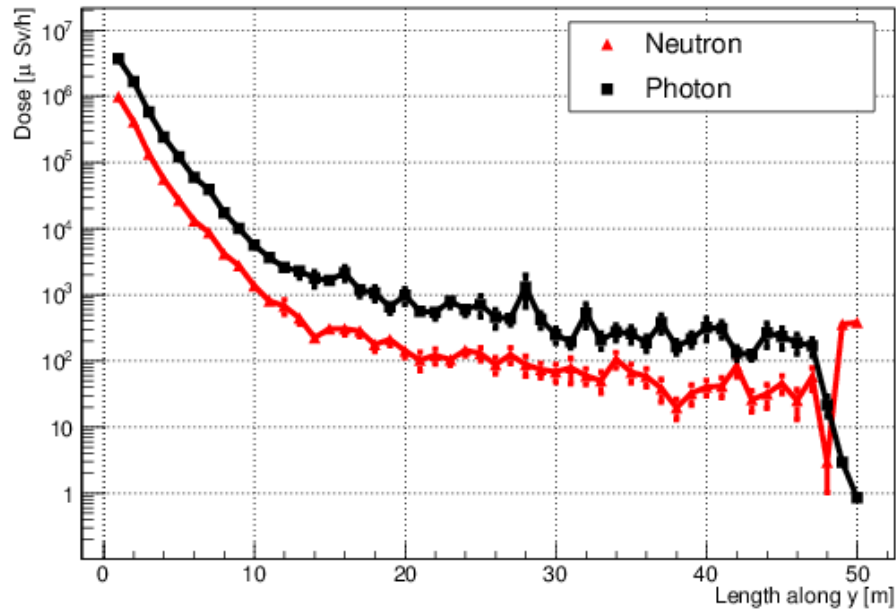

Curved guide ( $r_{\text{curvature}} = 1500\text{m}$ )

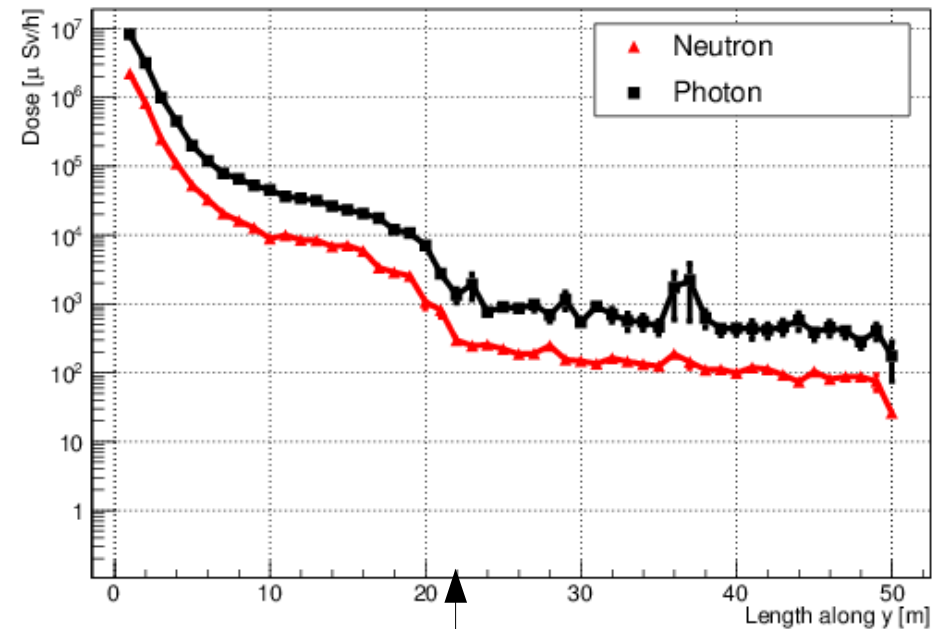

Line-of-sight lost




- Restricting to  $\lambda \in \{0.5 \text{ \AA} - 1.0 \text{ \AA}\}$
- Photon dose-rate follows neutron dose-rate ✓

# Conclusions

- Logging mechanism useful for guide design:
  - Monitor **intensity loss**
  - Optimizing use of high/low **reflectivity** mirrors
  - Calculate **dose-rates** along guide
- Works in instrument designers accustomed work-flow (**McStas**)

# Prospects

- Could be used to evaluate gamma and (energetic) neutron background at the sample position / instrument / detectors.
- Must be utilized on an instrument to instrument basis

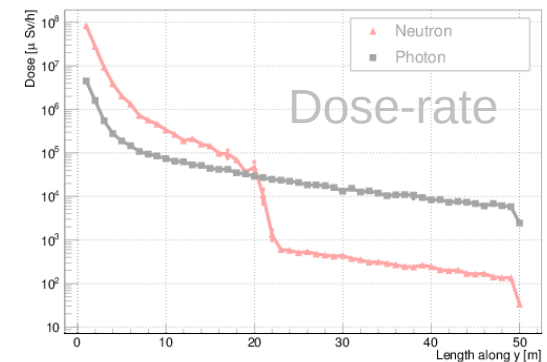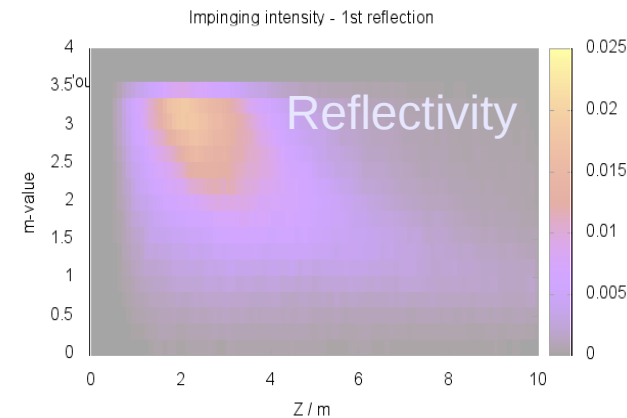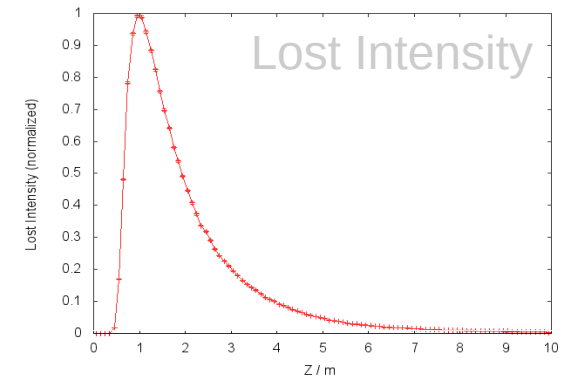

Backup slides

# Reflectivity curve

$$\begin{aligned} R &= \frac{R_0}{2} \left(1 - \tanh \frac{Q - m \cdot Q_c}{W}\right) \times (1 - \alpha(Q - Q_c)) && \text{for } Q > Q_c \\ R &= R_0 && \text{otherwise} \end{aligned} \quad (1)$$

7 where  $Q$  is the scattering vector,  $Q_c$  is the critical scattering vector,  $R_0$  is  
8 the low angle reflectivity constant,  $W$  is the width of supermirror cut-off,  $\alpha$  is  
9 the reflectivity slope, and  $m$  is the  $m$ -value of the material.

Taken from measurements



# Front-end: logger

```
COMPONENT src = Source_simple(  
    radius = 0.1, dist = 1, focus_xw = 0.1, focus_yh = 0.1, lambda0=5, dlambda=4.9)  
AT (0, 0, 0) RELATIVE Origin
```

```
COMPONENT psd0=PSD_monitor(  
    xwidth=0.1, yheight=0.1, filename="psd0")  
AT(0,0,0.5) RELATIVE PREVIOUS
```

```
COMPONENT s1=Scatter_logger()  
AT(0,0,1) RELATIVE src
```

```
COMPONENT guide_simple = Guide(  
    w1 = 0.1, h1 = 0.1, w2 = 0.1, h2 = 0.1, l = 10, R0 = 0.99,  
    Qc = 0.0219, alpha = 6.07, m = 2, W = 0.003)  
AT (0, 0, 1) RELATIVE src
```

```
COMPONENT s2=Scatter_logger_stop(logger=s1)  
AT(0,0,0) RELATIVE PREVIOUS
```

# Back-end: logger iterator

```
COMPONENT a0=Arm()  
AT(0,0,0) ABSOLUTE
```

```
COMPONENT iter1 = Scatter_log_iterator()  
AT(0,0,0) ABSOLUTE
```

```
COMPONENT mnd=Monitor_nD (  
    restore_neutron=1, yheight=10, radius=M_SQRT2*0.1,  
    options="previous no slit y bins=100", filename="mnd1.dat")  
AT(0,0,5) RELATIVE guide_simple  
ROTATED (90,0,0) RELATIVE guide_simple
```

```
COMPONENT iter2 = Scatter_log_iterator_stop(iterator=iter1)  
AT(0,0,0) RELATIVE iter1
```

```
COMPONENT a1 = Arm()  
AT (0,0,0) ABSOLUTE  
JUMP a0 WHEN(MC_GETPAR(iter2,loop))
```

# 10m setup

## - guide & source details

COMPONENT Origin = Progress\_bar()  
AT (0,0,0) ABSOLUTE

COMPONENT src = Source\_simple(  
radius = 0.1, dist = 1, focus\_xw = 0.1, focus\_yh = 0.1, lambda0=5, dlambda=4.9)  
AT (0, 0, 0) RELATIVE Origin

COMPONENT psd0=PSD\_monitor(  
xwidth=0.1, yheight=0.1, filename="psd0")  
AT(0,0,0.5) RELATIVE PREVIOUS

COMPONENT s1=Scatter\_logger()  
AT(0,0,1) RELATIVE src

COMPONENT guide\_simple = Guide(  
w1 = 0.1, h1 = 0.1, w2 = 0.1, h2 = 0.1, l = 10, R0 = 0.99,  
Qc = 0.0219, alpha = 6.07, m = 2, W = 0.003)  
AT (0, 0, 1) RELATIVE src

# m-value calculation

```
double mvalue;
int reflc;
int reflect_m-value(double *ns_tilde, struct Generalized_State_t *S0, struct Generalized_State_t *S1){
    /*position comes from "new" state*/
    ns_tilde[0]=S1->_x;ns_tilde[1]=S1->_y;ns_tilde[2]=S1->_z;
    /*velocity is the "old" state*/
    ns_tilde[3]=S0->_vx;ns_tilde[4]=S0->_vy;ns_tilde[5]=S0->_vz;
    /*time from new*/
    ns_tilde[6]=S1->_t;
    /*weight is impinging weight - old state*/
    ns_tilde[10]=S0->_p;

    double v = sqrt(S0->_vx*S0->_vx+S0->_vy*S0->_vy+S0->_vz*S0->_vz);
    double k = v*V2K;
    double theta = 0.5*acos(scalar_prod(S0->_vx,S0->_vy,S0->_vz,S1->_vx,S1->_vy,S1->_vz)/(v*v));
    mvalue = 2*k*sin(theta)/0.0219;
    reflc=S1->_idx;
    return 0;
}
```

## Another example: Specialized pseudo neutron state function → background along guide

```
/*position comes from "new" state*/  
ns_tilde[0]=S1->_x;ns_tilde[1]=S1->_y;ns_tilde[2]=S1->_z;  
  
/*velocity is the "old" state*/  
ns_tilde[3]=S0->_vx;ns_tilde[4]=S0->_vy;ns_tilde[5]=S0->_vz;  
  
/*time from new*/  
ns_tilde[6]=S1->_t;
```

Same as before

```
/*weight is difference old-new to mean the neutrons "deposited" in the guide wall*/  
ns_tilde[10]=S0->_p-S1->_p;
```

I.e.: The temporarily stored state is the **un-reflected neutrons** - normally discarded

Using the MCNPX-McStas interface: *Virtual\_MCNP\_ss\_output.comp* (McStas 2.0), the simulation of absorbed neutrons proceeds:




Neutron and gamma trajectories (a few example events from MCNPX → VisEd)

# New source – cold pencil

- ***Guide starts at z=200cm***
- c Source definition: cold, in guide opening
- sdef x=d2 y=d3 z=0.0 dir=d4 vec=0 0 1 erg=1e-8 par=n
- si2 h -1.0 1.0
- sp2 0 1
- si3 h -1.0 1.0
- sp3 0 1
- si4 h 0.99999 1 \$~0.25grad
- sp4 0 1

# Dose rates: cold-pencil-beam

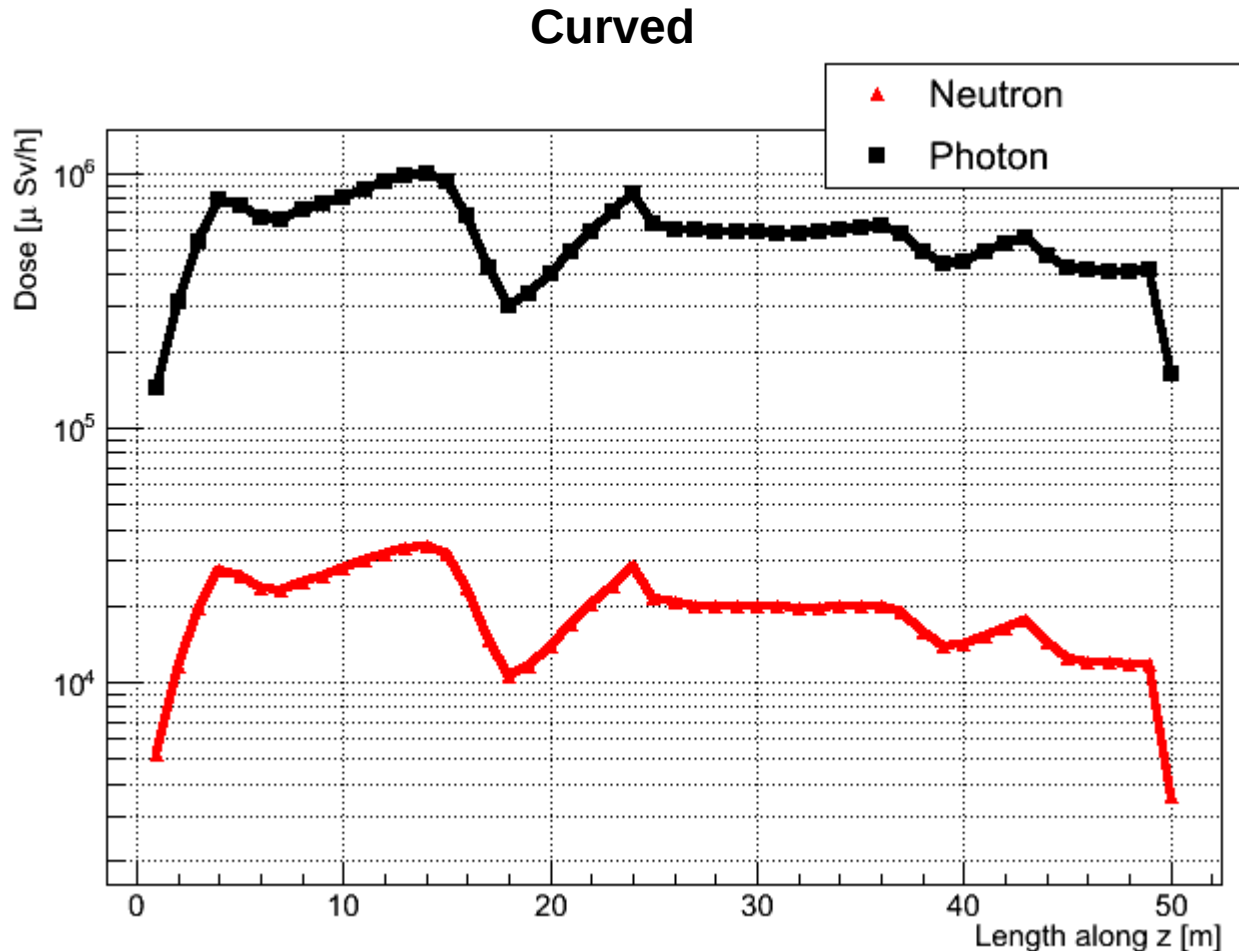


i.e. perfect match between curve structure

Q: how thus this match McStas-only treatment showing intensity loss?

# McStas-only treatment: intensity loss

(pencil-cold-beam)

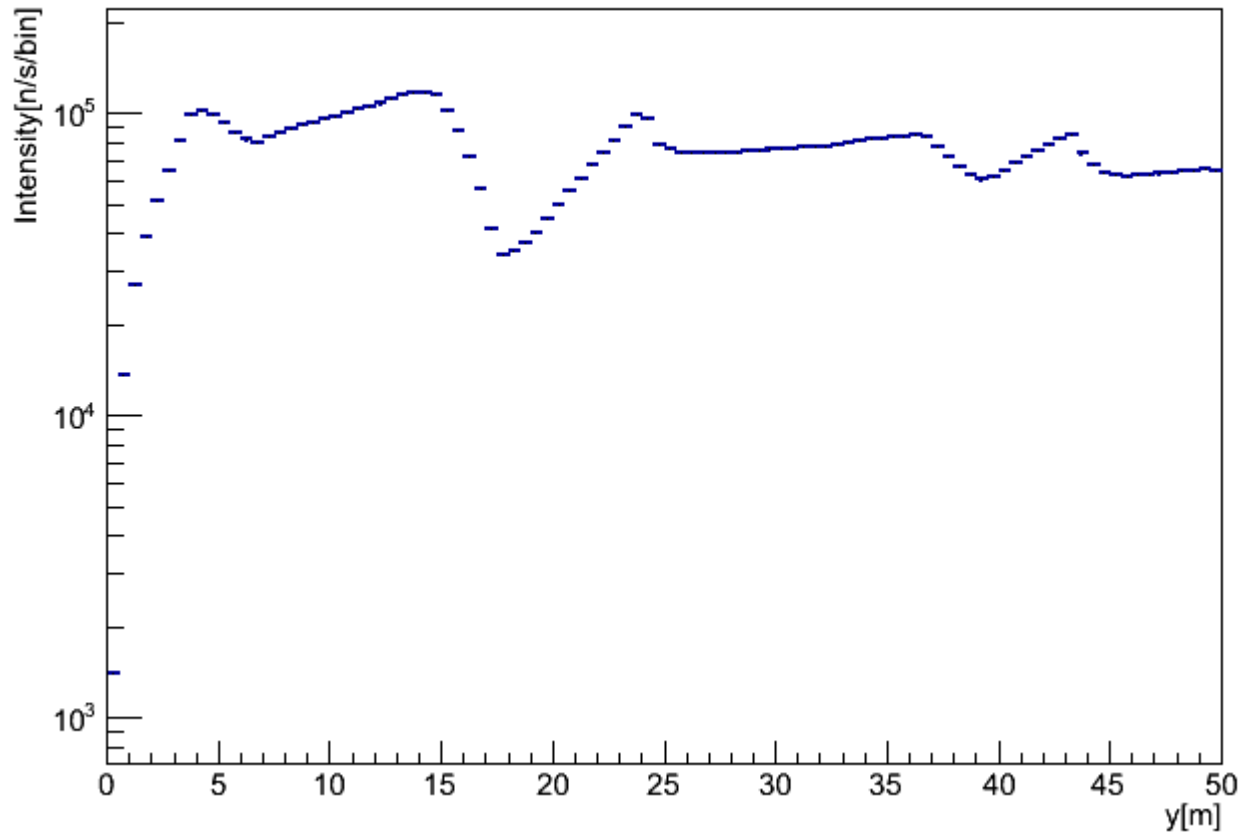



# Better validation example

- Using same geometry, but limit MCNPX source to  $[0.5-1]\text{\AA}$
- $\lambda$  range chosen such that
  - ~half the neutrons should be absorbed.
  - Avoid high energy, high intensity peak (showers!), not drawn by exp and  $1/r^2$  fall of, of energetic gammas.