



Microbial electrolysis contribution to anaerobic digestion of waste activated sludge, leading to accelerated methane production

Liu, Wenzong; Cai, Weiwei; Guo, Zechong; Yang, Chunxue; Varrone, Cristiano; Wang, Aijie

Published in:
Renewable Energy

Link to article, DOI:
[10.1016/j.renene.2016.01.082](https://doi.org/10.1016/j.renene.2016.01.082)

Publication date:
2016

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Liu, W., Cai, W., Guo, Z., Yang, C., Varrone, C., & Wang, A. (2016). Microbial electrolysis contribution to anaerobic digestion of waste activated sludge, leading to accelerated methane production. *Renewable Energy*, 91, 334-339. <https://doi.org/10.1016/j.renene.2016.01.082>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

1

2 **Microbial electrolysis contribution to anaerobic digestion of waste**
3 **activated sludge, leading to accelerated methane production**

4 **Wenzong Liu¹, Weiwei Cai², Zechong Guo², Ling Wang², Chunxue Yang², Cristiano Varrone³ and**
5 **Aijie Wang^{1,2*}**

6 1 Key Laboratory of Environmental Biotechnology, Research Center for Eco-Environmental Sciences,
7 Chinese Academy of Sciences, Beijing, 100085, China

8 2 State Key Laboratory of Urban Water Resource and Environment, Harbin Institute of Technology
9 (SKLUWRE, HIT), Harbin 150090, China

10 3 Technical University of Denmark, Department of Chemical and Biochemical Engineering, Center for
11 BioProcess Engineering, Lyngby, Denmark

12 *Corresponding author. E-mail address: ajwang@rcees.ac.cn

13

14 **Abstract**

15 Methane production rate (MPR) in waste activated sludge (WAS) digestion processes is typically limited
16 by the initial steps of complex organic matter degradation, leading to a limited MPR due to sludge
17 fermentation speed of solid particles. In this study, a novel microbial electrolysis AD reactor (ME-AD) was
18 used to accelerate methane production for energy recovery from WAS. Carbon bioconversion was
19 accelerated by ME producing H₂ at the cathode. MPR was enhanced to 91.8 gCH₄/m³ reactor/d in the
20 microbial electrolysis ME-AD reactor, thus improving the rate by 3 times compared to control conditions
21 (30.6 gCH₄/m³ reactor/d in AD). The methane production yield reached 116.2 mg/g VSS in the ME-AD
22 reactor. According to balance calculation on electron transfer and methane yield, the increased methane
23 production was mostly dependent on electron contribution through the ME system. Thus, the use of the
24 novel ME-AD reactor allowed to significantly enhance carbon degradation and methane production from
25 WAS.

26

27 **Keywords:** microbial electrolysis AD reactor; waste activated sludge; energy recovery; bio-electron;
28 methanogenesis

29

30 **1. Introduction**

31 The large amount of activated sludge generated during wastewater treatment poses a critical threat (when
32 not properly disposed) to ecological systems [1], while proper treatment and disposal of excess sludge is
33 quite expensive (Wei et al. 2003). On the other hand, anaerobic digestion (AD) is widely used for sludge
34 reduction as an energy saving and recovering method [2]. However, AD rate is substantially limited by the
35 first two steps (hydrolysis and acidogenesis) to convert complex organic compounds into suitable substrates
36 for methanogenesis, in raw sludge [3-5]. Commonly, it takes from 20 to 30 days to degrade 30-50% of the
37 total COD or volatile solids (VS) of raw WAS, under mild environmental conditions [6]. The pressure of
38 rapid human population growth and increasing energy demand have thus promoted further research on
39 development and improvement of an rate-accelerating AD process, in order to enhance biogas production
40 and achieve faster degradation rate from WAS [7, 8].

41 Recently, some researchers pointed out that bioelectrochemical systems have the ability to promote carbon
42 oxidation on anode and in-site CO₂ capture and reduction on cathode, thus providing additional CH₄
43 formation in an integrated AD system [9, 10]. Recently a direct interspecies electron transfer for
44 methanogenesis has been proved between *Geobacter* and *Methanosaeta* [11]. However, few efforts have
45 been made to better understand bioelectrochemical contributions to organic conversion or methane
46 promotion, which is very important to achieve viable reactor operations in the future. Lately, microbial
47 electrolysis cells (MECs) have been tested for their ability to convert waste organic compounds from
48 sludge fermentative liquid (SFL) to electrons and hydrogen, showing high efficiencies [12-14]. It seems
49 thus possible to achieve a faster conversion of complex substrates and fermentation end-products into H₂,
50 under an external voltage [15]. It is well-known that methane is synthesized by hydrogenotrophic and
51 acetoclastic methanogenesis from simple carbon sources, including CO₂-type substrate, methyl-type and
52 acid-type substrate (acetate) [16, 17]. More complex substrates can usually not be quickly (or directly)
53 converted to methane. However, recovery products on cathode would trigger AD process in different
54 energy-flow pathways, leading to methane production from CO₂ reduction [11]. Therefore, it is possible to
55 stimulate a fast methane production with the contribution of microbial electrolysis process. On the other
56 hand, the exact contribution of microbial electrolysis system in AD for sludge treatment still needs to be
57 well understood, both in terms of its contribution to enhanced substrate degradation, as well as
58 enhancement of methane production rate.

59 Therefore, in this study, a coupled system was tested, by putting a microbial electrolysis (ME) system into
60 an AD system, for raw waste activated sludge treatment at mild environmental conditions. The microbial
61 electrolysis system was enriched in MECs and the anodic biofilm was subsequently used to set up the ME-
62 AD reactor. The performance of the methane production rate was evaluated, based on current electrons in
63 the circuit of the ME-AD system. Moreover, functional communities (on key positions) were analyzed by
64 means of high throughput sequencing, to illustrate microbial electrolysis stimulation.

65

66 **2. Material and methods**

67 **2.1 Microbial electrolysis system setup**

68 Microbial electrolysis cells were set up to enrich functional anodic communities, using single chamber
69 reactors made of polycarbonate (45 mm diameter, 80 mm length; volume 130 mL) [18]. The anode was a
70 graphite brush (40 mm diameter, 80 mm length; 1.01 m² surface area). The cathode was made from carbon
71 cloth (40 mm diameter, YW-50 YiBang; China), covered with a Pt catalyst layer (0.5 mg Pt /cm² inner
72 side). Eight single-chamber MEC reactors were inoculated, using aeration tank effluent from the Wenchang
73 municipal WWTP in Harbin, China. All reactors were started up as replicates, at a fixed applied voltage of
74 0.8 V (FDPS-150, Fudan Tianxin Inc. China). Acetate (1500 mg L⁻¹) was used as carbon source in a
75 phosphate buffer medium (50 mM; pH = 7.0) [15]. The replicates were operated in 48 h batches, until
76 reaching stable (and similar) performance. Subsequently, three MEC reactors were randomly taken from
77 the replicates, and kept running, using sludge fermentative liquid as carbon source, to test the
78 biodegradation and energy recovery. Four anode brushes with functional biofilms were taken out from the
remaining replicates and used as bioanode to set up hybrid ME-AD reactors.

79 **2.2 ME-AD reactor operation and performance test**

80 The novel ME-AD reactor consisted of a glass cylinder of 70 mm inner diameter x 180 mm height, with an
81 effective volume of 650 mL. The anode brush with its biofilm (previously enriched in the MECs) and a
82 new cathode were put into the cylinder. The distance between downside cathode and upside anode brush
83 was 1 cm. The working volume was ~500 mL, with a headspace of ~150 mL, when the ME-AD reactor
84 was operated in batch mode with 0.8 V external voltage at the beginning (Fig. S1). Current of electron
85 transfer was measured over a 10 ohm resistor in series connection with reactor using a multimeter (model
86 2700; Keithley Instruments). The bioelectrochemical system can work well for hydrogen harvest if the
current went up over 0.5 mA [12, 19]. Two ME-AD reactors were set as replicates. Two AD reactors were

87 also operated as control reactor, without anode brush. 500 mL pretreated waste activated sludge was thus
88 put into the ME-AD reactor for anaerobic digestion at room temperature (20-25 °C). Batch operations were
89 monitored over 45 days, and six microbial community samples were taken at different time points.

2.3 Characteristics of waste activated sludge

90 Waste sludge was collected from the secondary sedimentation tank of the same local WWTP. The sludge
91 was concentrated by settling for 24 h and washing away the water layer. The large particles were separated
92 by means of a 40 mesh sieve before used as feedstock. The main characteristics of concentrated WAS are
93 reported in Table S1. Bi-frequency ultrasonic pretreatment was performed with 28+40 kHz ultrasonicator
94 (Ningbo Scientz Biotechnology Co., China), by applying an ultrasonic energy density of 0.5 kW/L for 10
95 min, before addition to the ME-AD reactors. Ultrasonic-pretreated WAS was hydrolyzed and acidified in
96 bench-scale batch experiments for 4 days, at room temperature of 20-25°C[12]. The sludge fermentative
97 liquid was centrifuged and collected for single chamber MEC tests.

2.4 Sample collection, DNA extraction and 16S rRNA gene pyrosequencing

98 Biofilm samples were taken from graphite fibers, which were cut from anodes or cathode cloth and
99 fragmented, using sterile scissors. Biofilm samples were taken in three different locations of the targeted
100 electrode and combined together for DNA extraction. Before DNA extraction, fibers were gently rinsed
101 with deionized water to remove the residual sludge [13]. Liquid samples were taken and centrifuged at
102 8000 g to remove supernatant; approximately 0.25 g pellet were used for DNA extraction. A rapid soil
103 DNA isolation Kit (SK8234, Sangon Biotech, Shanghai) was used to extract DNA, according to the
104 manufacturer's instructions. DNA was quantified by Qubit 2.0 DNA Kit for PCR amplification. PCR
105 amplicons were visualized by using gel electrophoresis to confirm amplification of properly-sized products.
106 Purified PCR products were quantified as described for the DNA extracts, then stored at -20 °C before
107 pooling for sequencing.

108 Miseq sequencing was constructed for Illumina, using bacterial primers 341F:
109 CCTACACGACGCTCTTCCGATCTN (barcode) CCTACGGGNGGCWGCAG and 805R:
110 GACTGGAGTTCCTTGGCACCCGAGAATTCCAGACTACHVGGGTATCTAATCC) for the V3-V4
111 region of the 16S rRNA gene. Raw sequencing data obtained from this study were deposited in the NCBI
112 Sequence Read Archive. To minimize the effects of random sequencing errors, low-quality sequences were
113 removed, by eliminating those without an exact match with the forward primer, those without a

114 recognizable reverse primer, length shorter than 200 nucleotides, or containing any ambiguous base calls
115 (Ns).

2.5 Analysis and calculation method

116 Voltages were measured over a 10 ohm resistor in each circuit, using a multimeter (model 2700; Keithley
117 Instruments). The electron production and coulombic contribution were calculated in order to characterize
118 the performance of the ME system [20]. The gas was collected in a gas bag (500 mL; Cali5-Bond;
119 Calibrated Instrument Inc) and the volume measured by means of a glass syringe. Gas composition
120 (methane, hydrogen, carbon dioxide) was analyzed by a gas chromatograph (Fuli, GC9790; Zhengjiang
121 instrument Inc, China), with a packed column [12] (TDX-01; 2 m length) and a TCD detector. VFAs were
122 analyzed by a gas chromatograph (Agilent, 4890; J&W Scientific, USA), with a capillary column (19095N-
123 123HP-INNOWAX; 30×0.530 mm×1.00 μm; J&W Scientific, USA) [20], equipped with an FID. Liquid
124 samples were centrifuged at 10,000 rpm min⁻¹ and filtered through 0.45 μm membrane filters, before GC
125 analysis. The sludge was characterized according to standard methods, including TSS, VSS[21].

126 The coulombic efficiency were calculated to characterize the performance of MEC reactor. Coulombic
127 efficiency indicated the recovery ability of electron, defined by the ratio of coulombs recovery to the total
128 coulombs in substrate, which is integrated by current and time according to the equation $Q = \int I \times t$. The
129 coulombs recovery can be calculated by the equation $Q = \int i \cdot \Delta t$, where i is the current of the external circuit.
130 The total coulombs can be calculated by the equation $Q_t = (COD_{in} - COD_{out}) \cdot V \cdot F \cdot b / M_{O_2}$, where F represents
131 the Faraday constant, 96485 C/mol; M_{O_2} is the molar mass of oxygen, 32 g/mol; b is the complete oxidation
132 requirement of electron per mole oxygen and b is 4 mol-e⁻/mol. The current to theoretical methane yield
133 was calculated by $CO_2 + 8H^+ + 8e^- = CH_4 + 2H_2O$ [22], where the electrons were determined by the
134 integration of current and time.

135 DNA sequences were clustered into operational taxonomic units (OTUs) by setting a 0.03 or 0.05 distance
136 limit (equivalent to 97% or 95% similarity), using the MOTHUR program. Sequences were
137 phylogenetically assigned to taxonomic classifications, using an RDP naïve Bayesian rRNA classifier with
138 a confidence threshold of 80% (<http://rdp.cme.msu.edu/classifier/classifier.jsp>). After phylogenetic
139 allocation of the sequences down to the phylum, class and genus level, relative abundance of a given
140 phylogenetic group was set as the number of sequences affiliated to that group, divided by the total number
141 of sequences per sample.

142 3. Result and discussion

143 **3.1 Fermentation products and enhanced organic removal in ME-AD system.**

144 The ME-AD and AD control reactors were directly filled with ultrasonic-pretreated WAS and operated
145 under batch operation (1 day). The highest VFAs accumulation in the AD reactor was 5100 mg COD/L
146 (from the 3rd to the 10th day), while it increased to 4300 mg COD/L in the ME-AD reactor (Fig. S3).
147 Methane production was detected after 4 days operation in all reactors. The current was below 2 mA in the
148 first 5 days, under a supplied voltage of 0.8 V. Subsequently, current in the ME-AD reactor started to
149 increase sensibly, going from 2.2 mA, (the 6th day) up to 11.8 mA on the 10th day (Fig. S2). Methane
150 production was simultaneously increased from 100 mL to 1200 mL during 10-35 day (Fig. 1). After 12
151 days, the obtained methane production rate was 91.8 gCH₄/m³ reactor/d (138 mL CH₄/ L reactor/d)
152 (R²=0.981) in the ME-AD, thus resulting in a significant improvement, compared to 30.6 gCH₄/m³
153 reactor/d (46 mL CH₄/L reactor/d) (R²=0.967) observed in the AD reactor. The degradation of
154 polysaccharides and proteins were enhanced in ME-AD reactor. Compared to AD control, a lower
155 accumulation was detected both on polysaccharides and protein in ME-AD (Fig. S4-5).

156 During enhancement of microbial electrolysis, the MECs achieved high efficiency performances with
157 coulombic efficiency of 102.7±4.5% in the direct-MEC start-up mode, using acetate as carbon source with
158 a COD removal of 87.5±3.3%, at an applied voltage of 0.8 V. Average hydrogen conversion yield reached
159 3.5±0.3 mol H₂/ mol acetate, with a hydrogen production rate of 1.7±0.1 L H₂/L reactor/d. Very little
160 methane was also detected, after approximately one month operation. However, in ME-AD reactor
161 hydrogen was only detected in the headspace on the 7th day, in one of ME-AD reactors out of four
162 replicates, indicating that methane was quickly produced under the functions of microbial electrolysis. It is
163 worth noting that acetotrophic methanogens can compete with anode respiring bacteria to degrade acetate
164 [17]. However, besides acetate, much more propionate, butyrate and valerate were also degraded, in a short
165 time, in the ME-AD reactor. A further enhancement was achieved after 26 days operation, with a methane
166 production yield in ME-AD reactors reaching 116.2 mg/g VSS, which was twice that of the AD control
167 (56.5 mgCH₄/g VSS). ME-AD showed an enhanced removal of polysaccharides and proteins (~30% and
168 ~50% respectively). VSS removal increased from 38% to 48%. Bioelectrochemical systems were proved to
169 have great potential to degrade complex carbons [23], with a high diversity of communities in electrode
170 biofilm to enhance carbon degradation [15].

171 **3.2 Methane production balance calculation based on electron transfer**

172 When bioelectrochemical contribution to methane production was evaluated, based on electrons in current,
173 the difference between the ME-AD and the AD control was quite close to the part of methane deriving
174 from bioelectrochemical contribution, suggesting that the increased part of methane was contributed mostly
175 by microbial electrolysis process. For instance, when methane production accelerated (between day 16 and
176 20) with a current of 11.08 ± 0.40 mA, the methane production averaged 66.98 mL per day in ME-AD. The
177 calculated (average) methane generation (representing the biochemical contribution) was 27.8 ± 1.0 mL per
178 day, based on current, while methane production in the AD control averaged 33.56 mL per day.

179 In addition, it was also proved when ME-AD was operated in open circuit (Fig. 2). The methane production
180 decreased from 55.9 ± 9.7 mL to 25.3 ± 6.9 mL when the applied voltage was removed (Table S2). Methane
181 production rate was reduced by 54.8% in open circuit of ME-AD reactor. It also reasonably matched the
182 part of reduced methane, which was calculated from current electrons (11.84 ± 0.55 mA) up to 29.7 ± 1.4
183 mL. The enhanced methanogenesis was primarily caused by the hydrogen-utilizing process in single
184 chamber MEC reactor [22]. Hydrogen consumption was also detected in other studies [9]. Furthermore, it
185 has been pointed out that anodic respiring bacteria could compete with acetotrophic methanogenesis on
186 organic oxidation [24]. Therefore, recovered hydrogen would be more feasible to hydrogen-utilizing
187 microorganisms.

188 **3.3 Microbial community structure detected on key locations of ME-AD reactors**

189 Community structure showed prominent changes on functional groups on the family level (Fig. 3). A clear
190 even distribution of anaerobic bacteria was detected at start-up phase (raw sludge). Specific community
191 enrichment started on the anode biofilm in ME-AD system. Bacterial families belonging to the
192 *Proteobacteria* and *Firmicutes* phyla dominated in the anode biofilm; however, typical anode respiring
193 bacteria (like *Shewanella* and *Geobacter*) were not overwhelming on the 3rd day, at low current generation.
194 Neither fermentative bacteria nor methanogens (*Archaea*) were enriched as dominant communities in
195 anode biofilm. Only after methane production accelerated (with a current of ~ 10 mA), the
196 bioelectrochemical process showed a significantly enriched community of *Geobacteria* (from initial 0.04%
197 to 21.86% of overall detected communities) in the anode biofilm. The two dominant communities belonged
198 to the families of *Anaerolineaceae* [25] and *Coriobacteriaceae* (*Coriobacteriaceae* is a subclass of
199 *Actinobacteria*), which are known to constitute a large part of anodic communities in bioelectrochemical
200 systems [26].

201 Furthermore, there was a great contribution to extracellular electron transport, witnessed by the anode
202 respiring communities found (Fig. 4), including *Geobacter* [27], *Shewanella* [28] and *Pseudomonas* [29].
203 *Geobacter* accounted for over 20% of total genus detected in the anode biofilm of ME-AD system (it was
204 only 0.11% at the start-up) and was also detected in the cathode biofilm (0.33%). Probably, the great
205 increase of *Geobacter* significantly enhanced organic oxidation and electron transferring, which occurred
206 simultaneously with the arising of current and methane production. In fact, *Geobacter* represents one of the
207 most important groups of exoelectrogens, showing high efficiency of electron transport between bacteria
208 and electrode [27, 30]. Recently a direct interspecies electron transfer was proved between *Geobacter*
209 *metallireducens* and *Methanosarcina barkeri* [31]. Thus, the development of a *Geobacter* community at the
210 cathode is considered to have a great potential for the methane recovery in a ME system.

211 **3.4 Hydrogenotrophic methanogens and *Acetobacterium* accumulation by ME.**

212 Methanogens detected in the suspended solution were as low as 0.03% in AD and 0.05% in ME-AD,
213 compared to 0.3% of the sludge start-up (Fig. 4). On the other hand, there was a remarkable ten-fold
214 increase (0.56%) in anode biofilm (data not shown) of ME-AD system, at the end of the study. In addition,
215 acetotrophic methanogens also increased (from initial 0.03% to 0.49%) in anode biofilm. Interestingly, they
216 did not further increased in the ME system, despite the higher VFAs (i.e. acetate) concentration.
217 *Methanosaeta* was the dominant class of acetotrophic methanogens in sludge start-up, with 0.27% out of
218 total genus detected, while only 0.03% of total hydrogenotrophic methanogens were detected during sludge
219 digestion. In the cathode biofilm, hydrogenotrophic methanogens were substantially boosted, which well
220 supported the increased methane production rate. Few hydrogenotrophic methanogens were detected in
221 suspended solution surrounding the electrodes.

222 Although it was inevitable to inhibit methanogens in the system[32], it was pointed out that anode
223 respiring bacteria (ARB) can compete methanogens in anode biofilm because ARB have faster carbon
224 degradation than methanogens[22]. Based on coulombic efficiency evaluation, which was calculated to
225 characterize the recovery ability of bioanode from electrons of substrates, usually ~90% coulombic
226 efficiency was achieved by ABR, which mean that ~10% loss may be caused by other microorganism
227 (including acetotrophic methanogens) in single chamber MECs[22]. Therefore, acetotrophic methanogens
228 would not easily become overwhelming communities over ARB on anode. Furthermore, it was very
229 important to establish an ARB-dominant bioanode for integrated reactor firstly in order to enhance
230 bioelectrochemical contributing methane production rate over conventional AD. Otherwise, an increased

231 biomass with dominant anaerobic digestion functions will mainly contribute to bioreactor performance
232 improvement from biomass but not from current[33].

233 Among methanogens, the group that showed the highest increase was *Methanobacterium* (6.4% of total
234 genera detected), which belongs to the class *Methanobacteria*, and is known to grow on H₂/CO₂ and
235 formate as carbon source [17]. The second group was represented by *Methanosaeta* (accounting for 1.2%),
236 which functioned as acetotrophic methanogen. The third group was represented by *Methanospirillum*
237 (accounting for 0.56%), which is also known to be a hydrogenotrophic methanogen, belonging to the
238 family of *Methanospirillaceae*. The remaining detected genera were *Methanobrevibacter* (0.01%,
239 hydrogenotrophic) and *Methanosarcina* (0.01%, acetotrophic). *Methanosaeta* was the only genus also
240 found in initial raw sludge and solution communities in AD control. In the ME system, all
241 hydrogenotrophic processes were limited to the biofilm layer of cathode (i.e. *Methanospirillum*, with 0.01%)
242 and did not significantly spread to planktonic area. As reported by Rotaru and colleagues [11],
243 hydrogenotrophic methanogens are usually regulated by the hydrogen produced on the cathode surface or
244 by direct interspecies electron transport.

245 According to the balance calculation, it was reasonable to presume that electrons of current contributed to
246 final methane production. Noticeably, cathodic hydrogenotrophic methanogens contributed most to the
247 enhanced methane production, though anodic methanogens were slightly enriched. In any case, the detected
248 anodic methanogens were only 6% of those on the cathode, thus giving a far from predominant contribution
249 to total methane production. Actually, acetotrophic methanogens would not be competitive with
250 hydrogenotrophic methanogens in single chamber MEC reactor [22]. On the other hand, *Acetobacterium*
251 (family *Eubacteriaceae*), a hydrogen scavenging bacterium, was substantially enriched in the cathode
252 biofilm. It was reported that homo-acetogenic processes only occur if methanogenesis is inhibited [34].
253 However, in the present study the hydrogen generation lead the coexistence of *Acetobacterium* and
254 hydrogenotrophic methanogens in cathode biofilm. This was witnessed by a stimulated increase of
255 *Methanosaeta* (1.2%) in the cathode biofilm, which was even higher than the acetotrophic methanogens in
256 anode biofilm (0.49%). The reactions were clearly limited to the cathode biofilm, because no noticeable
257 increase of acetate or acetotrophic methanogens were detected in the solution surrounding the cathode,
258 while the impact of this inner recycle is still poorly understood. Nonetheless, this phenomenon proved to
259 represent an important adaptation for biocathode communities to increase methane production rate in
260 sludge fermentation.

261

262 **4. Conclusions**

263 Methane production rate from waste activated sludge treatment were improved by 3 times (from 30.6 to
264 91.8 gCH₄/m³ reactor/d) in a modified anaerobic digestion reactor, coupled with a microbial electrolysis
265 system with a fixed external voltage of 0.8 V. Furthermore, the carbon degradation of VFAs,
266 polysaccharides and proteins was accelerated by 22%, 43% and 48%, respectively, by the microbial
267 electrolysis system. The VSS removal increased from 38% to 48%. Hydrogenotrophic methanogens were
268 substantially enriched in cathode biofilm, which in turn lead to an increased methane production rate. The
269 increased methane production was comparable to methane conversion from current electrons. Microbial
270 communities in electrode biofilms shifted under application of an external voltage. Bioelectrochemical
271 function was enhanced by enrichment of *Geobacter* sp., thus favouring extracellular electron transport in
272 anode biofilm. Moreover, hydrogenotrophic methanogens and *Acetobacterium* were substantially enriched
273 in cathode biofilm, which was important for enhanced energy recovery and methane production. Based on
274 electron transport, increased biogas production was primarily caused by a hydrogen-utilizing process, in
275 ME-AD system.

276

277 **Acknowledgements**

278 This research was supported by National Science Foundation for Distinguished Young Scholars (Grant
279 No.51225802), by National Natural Science Foundation of China (NSFC, No. 51208496 and 51578534),
280 by the Major Science and Technology Program for Water Pollution Control and Treatment (No.
281 2014ZX07204-005), by “Hundred Talents Program” of the Chinese Academy of Sciences, and by Project
282 135 of Chinese Academy of Sciences (No. YSW2013B06), and by Sino-EU International S&T cooperation
283 program (No. S2015GR1012).

284


285 **References**

- 286 [1] J. Benidickson, The culture of flushing: a social and legal history of sewage, UBC Press, Toronto, 2007.
287 [2] W. Rulkens, Sewage sludge as a biomass resource for the production of energy: overview and
288 assessment of the various options, *Energ Fuel*, 22 (2007) 9-15.
289 [3] A.K. Wahidunnabi, C. Eskicioglu, High pressure homogenization and two-phased anaerobic digestion
290 for enhanced biogas conversion from municipal waste sludge, *Water Res*, 66 (2014) 430-446.
291 [4] S. Astals, M. Esteban-Gutierrez, T. Fernandez-Arevalo, E. Aymerich, J.L. Garcia-Heras, J. Mata-
292 Ahiarez, Anaerobic digestion of seven different sewage sludges: A biodegradability and modelling
293 study, *Water Res*, 47 (2013) 6033-6043.
294 [5] K.D. Ravindra, C.L. Mukesh, J. Michael, P. McCarthy, *Recycling and Reuse of Sewage Sludge*,
295 Thomas Telford, London, 2001.

- 296 [6] G.F. Parkin, W.F. Owen, Fundamentals of anaerobic digestion of wastewater sludges, *J Environ Eng*,
297 112 (1986) 867-920.
- 298 [7] J. Ariunbaatar, A. Panico, G. Esposito, F. Pirozzi, P.N.L. Lens, Pretreatment methods to enhance
299 anaerobic digestion of organic solid waste, *Appl Energ*, 123 (2014) 143-156.
- 300 [8] L.Y. Jin, G.M. Zhang, H.F. Tian, Current state of sewage treatment in China, *Water Res*, 66 (2014) 85-
301 98.
- 302 [9] T. Bo, X. Zhu, L. Zhang, Y. Tao, X. He, D. Li, Z. Yan, A new upgraded biogas production process:
303 Coupling microbial electrolysis cell and anaerobic digestion in single-chamber, barrel-shape stainless
304 steel reactor, *Electrochem Commun*, 45 (2014) 67-70.
- 305 [10] G.C. Premier, J.R. Kim, J. Massanet-Nicolau, G. Kyazze, S.R.R. Esteves, B.K.V. Penumathsa, J.
306 Rodriguez, J. Maddy, R.M. Dinsdale, A.J. Guwy, Integration of biohydrogen, biomethane and
307 bioelectrochemical systems, *Renew Energ*, 49 (2013) 188-192.
- 308 [11] A.E. Rotaru, Shrestha, P.M, Liu, F., Shrestha, M., Shrestha, D., Embree, M., Zengler, K., Wardman,
309 C., Nevin, K.P. and Lovley, D.R., A new model for electron flow during anaerobic digestion: direct
310 interspecies electron transfer to *Methanosaeta* for the reduction of carbon dioxide to methane, *Energ*
311 *Environ SCI*, 7 (2014) 408-415.
- 312 [12] W. Liu, S. Huang, A. Zhou, G. Zhou, N. Ren, A. Wang, G. Zhuang, Hydrogen generation in microbial
313 electrolysis cell feeding with fermentation liquid of waste activated sludge, *Int J Hydrogen Energ*, 37
314 (2012) 13859-13864.
- 315 [13] L. Lu, D. Xing, N. Ren, Pyrosequencing reveals highly diverse microbial communities in microbial
316 electrolysis cells involved in enhanced H₂ production from waste activated sludge, *Water Res*, 46
317 (2012) 2425-2434.
- 318 [14] L. Wang, W. Liu, C. Yang, A. Zhou, W. Aijie, Enhanced biohydrogen production from waste
319 activated sludge in combined strategy of chemical pretreatment and microbial electrolysis, *Int J*
320 *Hydrogen Energ*, 39 (2014) 11913-11919
- 321 [15] W. Liu, A. Wang, S. Cheng, B.E. Logan, H. Yu, Y. Deng, J.D. Nostrand, L. Wu, Z. He, J. Zhou,
322 Geochip-based functional gene analysis of anodophilic communities in microbial electrolysis cells
323 under different operational modes, *Environ Sci Technol*, 44 (2010) 7729-7735.
- 324 [16] D.P. Chynoweth, Environmental impact of biomethanogenesis, *Environmenl monit assess*, 42 (1996)
325 3-18.
- 326 [17] B. Demirel, P. Scherer, The roles of acetotrophic and hydrogenotrophic methanogens during anaerobic
327 conversion of biomass to methane: a review, *Rev Environ SCI Bio*, 7 (2008) 173-190.
- 328 [18] Y.Z. Wang, A.J. Wang, W.Z. Liu, Q. Sun, Enhanced azo dye removal through anode biofilm
329 acclimation to toxicity in single-chamber biocatalyzed electrolysis system, *Bioresource Technol*, 142
330 (2013) 688-692.
- 331 [19] W. Liu, A. Wang, D. Sun, N. Ren, Y. Zhang, J. Zhou, Characterization of microbial communities
332 during anode biofilm reformation in a two-chambered microbial electrolysis cell (MEC), *J Biotechnol*,
333 157 (2012) 628-632.
- 334 [20] A. Zhou, C. Yang, Z. Guo, Y. Hou, W. Liu, A. Wang, Volatile fatty acids accumulation and
335 rhamnolipid generation in situ from waste activated sludge fermentation stimulated by external
336 rhamnolipid addition, *Biochem Eng J*, 77 (2013) 240-245.
- 337 [21] A. Zhou, J. Du, C. Varrone, Y. Wang, A. Wang, W. Liu, VFAs bioproduction from waste activated
338 sludge by coupling pretreatments with *Agaricus bisporus* substrates conditioning, *Process Biochem*, 49
339 (2014) 283-289.
- 340 [22] A. Wang, W. Liu, S. Cheng, D. Xing, J. Zhou, B.E. Logan, Source of methane and methods to control
341 its formation in single chamber microbial electrolysis cells, *Int J Hydrogen Energ*, 34 (2009) 3653-
342 3658.
- 343 [23] S. Cheng, B.E. Logan, Sustainable and efficient biohydrogen production via electrohydrogenesis, *P*
344 *Natl Acad Sci USA*, 104 (2007) 18871-18873.
- 345 [24] S. Hattori, Syntrophic acetate-oxidizing microbes in methanogenic environments, *Microbes Environ*,
346 23 (2008) 118-127.
- 347 [25] L. Montoya, L.B. Celis, M. Gallegos-García, E. Razo-Flores, Á.G. Alpuche-Solís, Consortium
348 diversity of a sulfate-reducing biofilm developed at acidic pH influent conditions in a down-flow
349 fluidized bed reactor, *Eng Life SCI*, 13 (2013) 302-311.
- 350 [26] B. Liang, H. Cheng, J.D. Van Nostrand, J. Ma, H. Yu, D. Kong, W. Liu, N. Ren, L. Wu, A. Wang,
351 Microbial community structure and function of Nitrobenzene reduction biocathode in response to
352 carbon source switchover, *Water Res*, 54 (2014) 137-148.
- 353 [27] D. Lovely, R. Mahadevan, K. Nevin, Systems biology approach to bioremediation with extracellular
354 electron transfer, in: D. Eduardo (Ed.) *Microbial Biodegradation-Genomics and Molecular Biology*,
355 Caister Academic Press, Norfolk, UK, 2008, pp. 71-96.

- 356 [28] E. Marsili, D.B. Baron, I.D. Shikhare, D. Coursolle, J.A. Gralnick, D.R. Bond, Shewanella secretes
357 flavins that mediate extracellular electron transfer, *P Natl Acad Sci USA*, 105 (2008) 3968-3973.
- 358 [29] A. Venkataraman, M.A. Rosenbaum, S.D. Perkins, J.J. Werner, L.T. Angenent, Metabolite-based
359 mutualism between *Pseudomonas aeruginosa* PA14 and *Enterobacter aerogenes* enhances current
360 generation in bioelectrochemical systems, *Energ Environ SCI*, 4 (2011) 4550-4559.
- 361 [30] J.E. Champine, B. Underhill, J.M. Johnston, W.W. Lilly, S. Goodwin, Electron Transfer in the
362 Dissimilatory Iron-reducing Bacterium *Geobacter metallireducens*, *Anaerobe*, 6 (2000) 187-196.
- 363 [31] A.E. Rotaru, P.M. Shrestha, F. Liu, B. Markovaite, S. Chen, K. Nevin, D. Lovley, Direct interspecies
364 electron transfer between *Geobacter metallireducens* and *Methanosarcina barkeri*, *Appl Environ*
365 *Microbiol*, 80 (2014) 4599-4605.
- 366 [32] C. Liu, W. Liu, J. Liu, X. Zhou, A. Wang, J. Nan, The effect of a short term biofilm-aeration treatment
367 on energy recovery in microbial electrolysis cells, *RSC Adv*, 5 (2015) 69714-69719.
- 368 [33] J. De Vrieze, S. Gildemyn, J.B.A. Arends, I. Vanwonterghem, K. Verbeken, N. Boon, W. Verstraete,
369 G.W. Tyson, T. Hennebel, K. Rabaey, Biomass retention on electrodes rather than electrical current
370 enhances stability in anaerobic digestion, *Water Res*, 54 (2014) 211-221.
- 371 [34] P. Parameswaran, H. Zhang, C.I. Torres, B.E. Rittmann, R. Krajmalnik-Brown, Microbial community
372 structure in a biofilm anode fed with a fermentable substrate: the significance of hydrogen scavengers,
373 *Biotechnol Bioeng*, 105 (2010) 69-78.
- 374

375

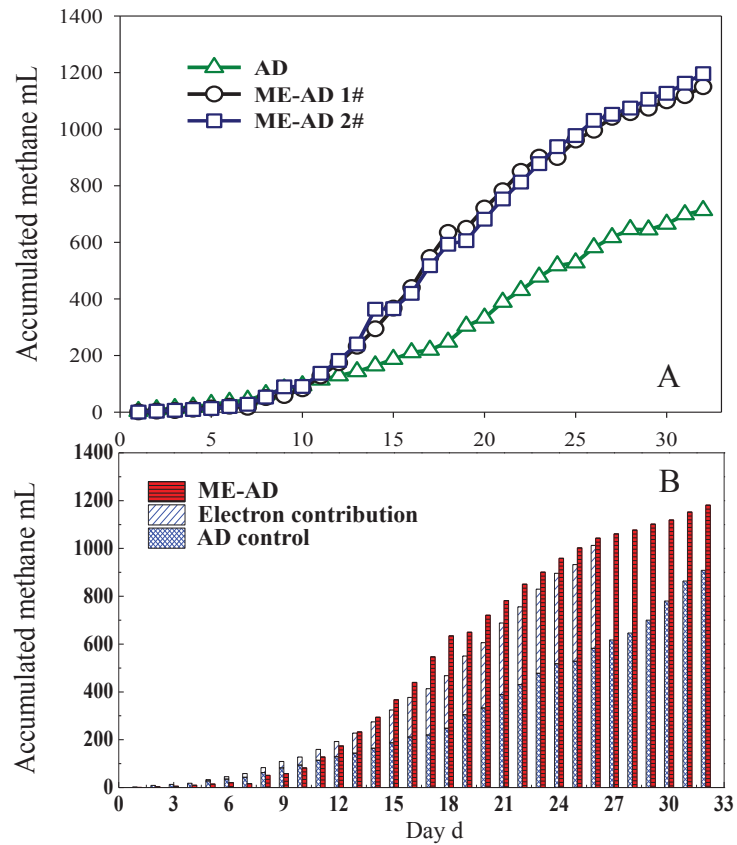


376

377

Figure 1 Methane production (A) and contribution of electrons (B) in ME-AD reactor (External voltage 0.8

378

V for ME-AD: 0-27 d; Voltage cut: 27-32 d)

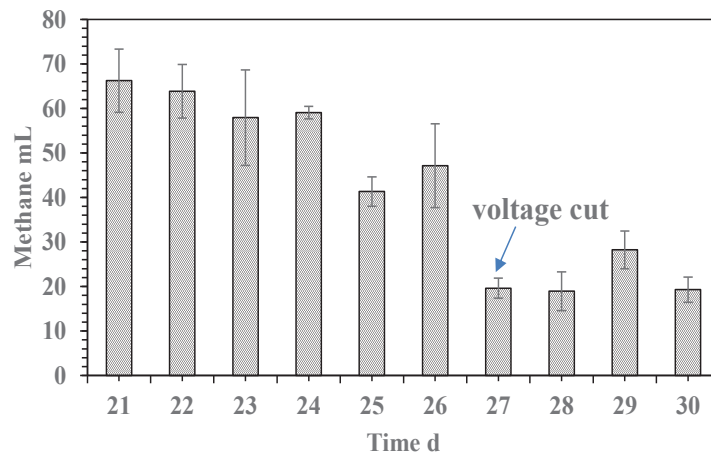


379

380

Figure 2 Methane production with and without applied voltage in ME-AD reactors

381

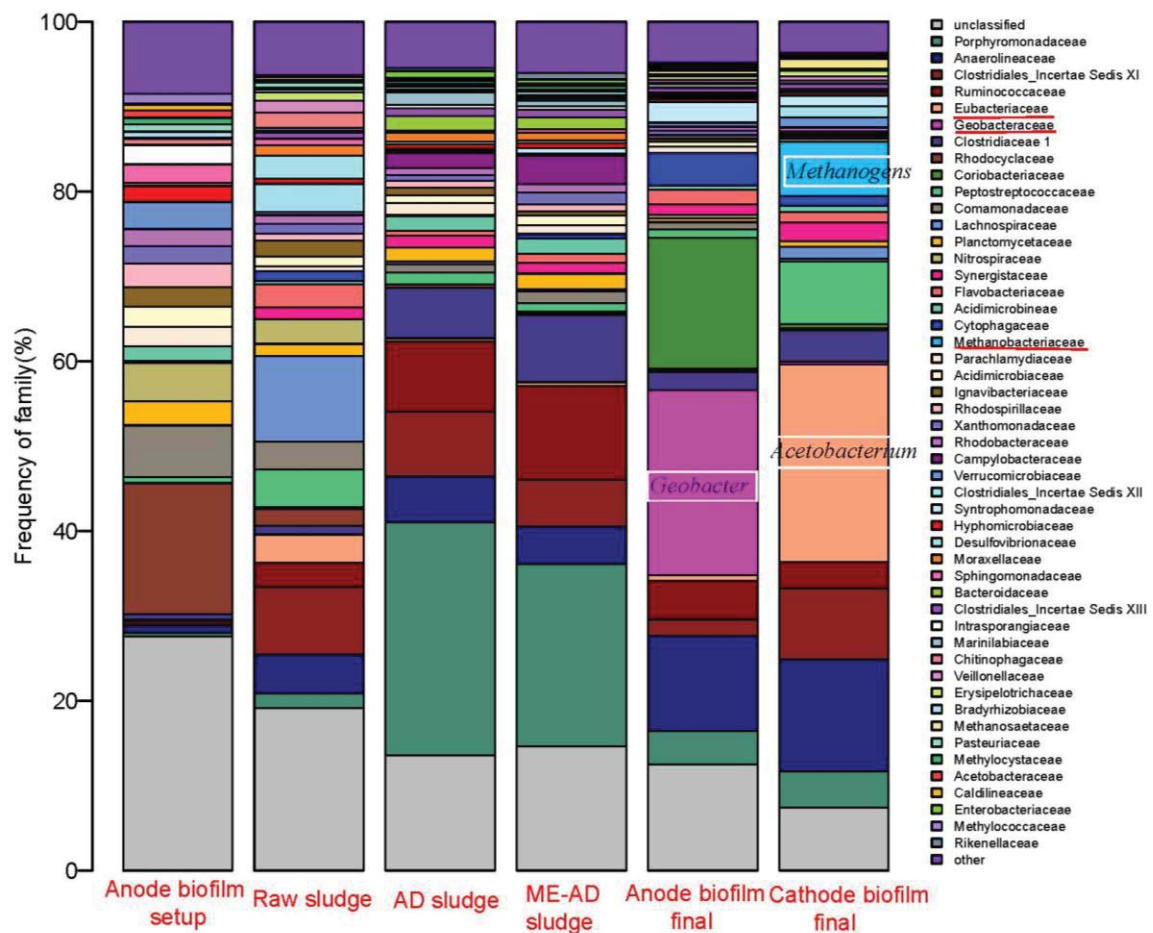


382

383

Figure 3 Community structure on classifier of family regulated by microbial electrolysis in anaerobic digestion

384

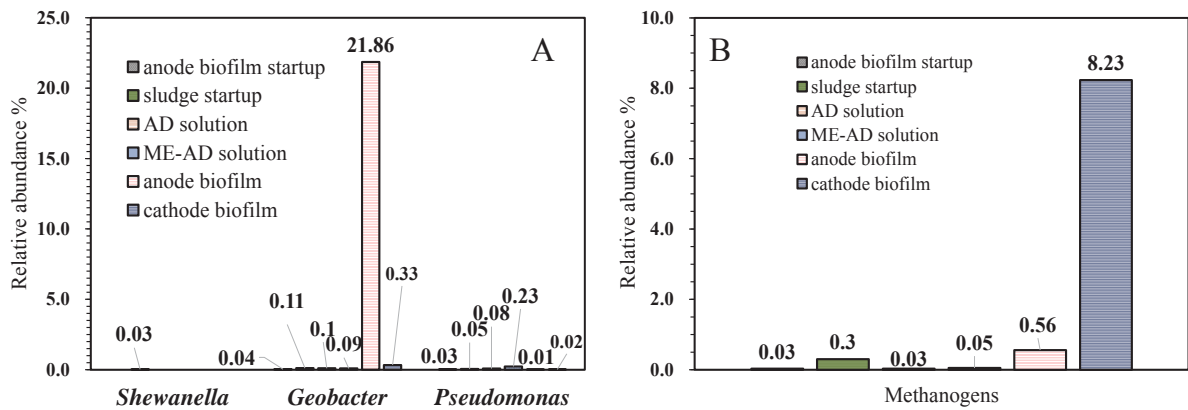

385

386

Figure 4 Dominant species of anode respiring bacteria (A) and methanogens (B) in different positions of ME-AD reactor

387

388

389

Supplementary Interactive Plot Data (CSV)

[Click here to download Supplementary Interactive Plot Data \(CSV\): Supplementary.docx](#)