



Coastal Erosion and Flooding Hazards on the North Sea Coast at Thyboron, Denmark

Sørensen , Per; Sørensen, Carlo Sass; Nielsen, Peter; Ciocan, Radu; Knudsen, Per

Publication date:
2016

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Sørensen , P., Sørensen, C. S., Nielsen, P., Ciocan, R., & Knudsen, P. (2016). Coastal Erosion and Flooding Hazards on the North Sea Coast at Thyboron, Denmark. Poster session presented at International Coastal Symposium 2016, Sydney, Australia.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

COASTAL EROSION AND FLOODING HAZARDS ON THE NORTH SEA COAST AT THYBORON, DENMARK



www.cerf-jcr.org

Per Sorensen ¹, Carlo Sorensen ^{1,2}, Peter Nielsen ³, Radu Ciocan ¹, Per Knudsen ²

- 1 Danish Coastal Authority, Coast & Climate, Lemvig, Denmark (ps@kyst.dk; rci@kyst.dk)
- 2 DTU Space, Geodesy, Lyngby, Denmark (carlos@space.dtu.dk; pk@space.dtu.dk)
- 3 The University of Queensland, School of Civil Engineering, St Lucia, Australia (p.nielsen@uq.edu.au)



INTRODUCTION

Since a breach of the coastal barrier in 1862, the Thyboron Channel connecting the North Sea and the Lim Fiord has been artificially maintained by construction of breakwaters and groins on the North Sea coast and inside the channel, respectively. Sand nourishment schemes have since the 1980s counteracted the natural erosion in the upper profile on the North Sea coast where the alongshore sediment transport converges towards the channel and deposits up to 1 million m³/y on the flood tidal delta inside the fiord, Figure 1.



Figure 1. The Danish North Sea coast at Thyboron, the channel, and the flood tidal delta inside the Lim Fiord.

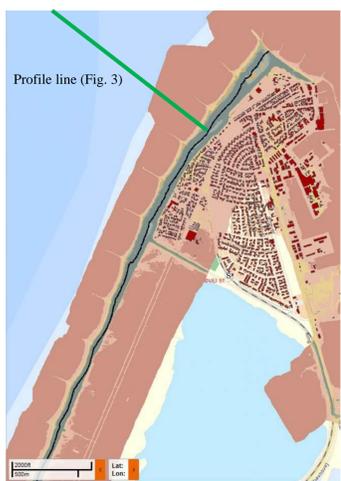


Figure 2. Small sandy barriers (green) provide safety. In black is the safety line. Flood prone areas in red and yellow.

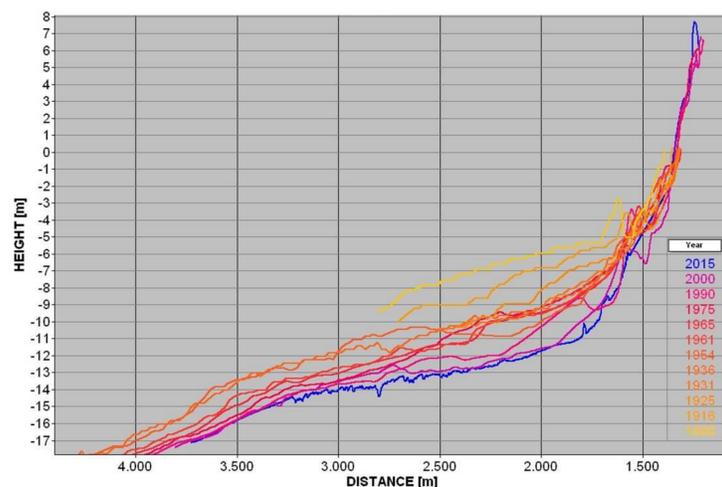


Figure 3. Coastal profile evolution, 1900-2015. The upper profile from -6 m DVR90 has been sand nourished since the late 1980's. Profile line shown in Figure 2.

COASTAL EROSION HAZARDS

The open coast still experiences net erosion in the lower parts of the profile, and Figure 2 shows the narrow sandy barrier which protects Thyboron from getting flooded. Each year the barriers on each side of the channel are nourished with 500,000 m³ of sand on average. This volume is sufficient to stop the retreat of the upper profile to -6 m DVR90. However, this amount has to be increased by 20 % until 2050 as the coastal steepening continues, Figure 3, to counteract the increased sand depletion of the upper profile.

In the navigation channel, the deeper part is expected to shift further eastward following the trend from 1958 to 2005. The navigation channel, which already has to be extensively dredged today, will experience an increased need for dredging ahead.

COASTAL FLOODING HAZARDS

The cross-sectional area of the channel is out of equilibrium with the tidal prism and increases; leading to more extreme storm surge levels inside the fiord, Figure 4. Furthermore, the town of Thyboron experiences a differentiated net land subsidence of 2-8 mm/y. The increased cross-section, land subsidence and climate changes together will increase the future flood risk in Thyboron significantly, Figure 5.

THE FUTURE

Eight different options to manage the erosion and flooding hazards in the future have been analyzed. The technically preferred option is to extend of one of the groins to reduce the cross-sectional area to reduce the net erosion rates on the barriers, to limit storm surge water levels, and to makes it easier to enter the navigation channel. A sluice solution has also been analyzed due mainly to environmental issues, Figure 6. A more detailed analysis work is still necessary, however, in order to effectively deal with the combined erosion and flood hazard challenges and to decide upon the optimal solution for the future protection of Thyboron and the Lim Fiord barriers.

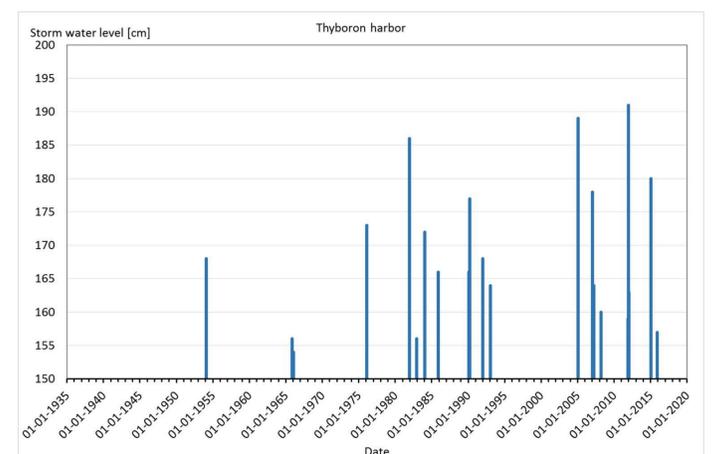


Figure 4. Heights of storm surge levels above 150 cm DVR90 at Thyboron Harbor tide gauge since 1935. Gauge position in Figure 1.



Figure 5. Potential flooding extent from a storm surge at Thyboron Harbor with a return period of 50 years in 2016 (left) and in 2060 including sea level rise and land subsidence.



Figure 6. Technically preferred management option: extending a groin to a breakwater (left) and an alternative management option with a sluice.