



Highly Enhanced Risk Management Emergency Satellite

Dalmeir, Michael; Gataullin, Yunir; Indrajit, Agung; Kotsiaros, Stavros; Tesmer, Volker

Publication date:
2008

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Dalmeir, M., Gataullin, Y., Indrajit, A., Kotsiaros, S., & Tesmer, V. (2008). Highly Enhanced Risk Management Emergency Satellite. Poster session presented at International Planetary Probe Workshop, .

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



Highly Enhanced Risk Management Emergency Satellite.


Technical University München,
MICHAEL DALMEIR, YUNIR GATAULLIN, AGUNG INDRAJIT, STAVROS KOTSIAROS, VOLKER TESMER

1. HERMES MISSION OBJECTIVES

The HERMES Satellite is designed to provide information to reduce the risk of floods or to even avoid them (flood management) and monitor the Earth surface. If there is a need in future, satellite's payload and the bus can be used on other planets. The mission objectives comprise:

- Emergency procedures: crisis management and damage assessment (also use: real-time data about surface water, precise Digital Terrain Model (DTM))
 - Identify critical/decisive moments during a crisis
 - Identify plans/responses to overcome the crisis or minimize the damages
- Forecasting: risk assessment and prediction (also use: long-term data from rain, rivers, lakes, soil moisture, precise DTM)
 - What will happen in case of a flood (damage classification)
 - How probable is a certain risk scenario (probability classification)
- Prevention: avoid floods (also use: data of land use, surface sealing, precise DTM)
 - Establish conditions that will generally avoid floods
 - Establish actions if several flood risk factors add-up (which might interact)

3. SYSTEM ARCHITECTURE AND PROJECT PHASES

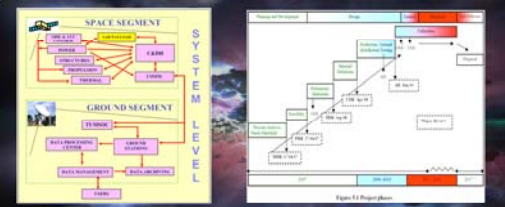

2. OPERATIONAL REQUIREMENTS

To achieve the mission objectives, the operational requirements are specified as follows:

- Orbit (see also Ch. 4 Orbit Selection for details)**
 - Cover whole earth surface in three days
 - Low to provide good resolution but high enough for operational lifetime of five years
 - Maximum solar power use
- SAR sensor (see also Ch. 6 Scientific Payload)**
 - SAR sensor shall sense surface water
 - High resolution (10 m to 100 m)
 - SAR sensor must produce data that can be used for simple reflectivity, polarization and interferometry, as
 - single radar pictures (2D reflectivity => surface-water Yes/No)
 - polarization for quality & details
 - interferometry
 - Same time, different place => precise height
 - Same place, different time => very precise height change
- Spacecraft bus (see also Ch. 5 Spacecraft bus)**
 - Orbit stability and altitude control in such a way that
 - HERMES can be lifted from initial to final orbit,
 - HERMES can be kept at target altitude,
 - Altitude: HERMES SAR beam can be pointed precise enough,
 - Orbit: kept sufficiently precise,
 - Propulsion scheduled to last full life-time
 - Command and data handling subsystem
 - runs stable and free of error,
 - without data lost.
 - Communication subsystem
 - provides smoothly working communication,
 - without time-tag for data transmission.
 - Power subsystem
 - ensures power provision during operational lifetime.
 - Thermal control subsystem
 - keeps the thermal equilibrium of the satellite.
 - Structures and mechanics
 - carry and protect the other subsystems
- Ground segment (see also Ch. 6 mission architecture)**
 - ensures good global coverage for a quick and persistent access to data,
 - provides a data rate for no loss of data,
 - keeps redundancy.

4. ORBIT SELECTION, COVERAGE and PROJECT PHASES


The SAR satellite orbit altitudes are usually in the range of 500–800 km. The orbital parameters of several Earth observation satellites (e.g. Envisat, ERS-2, Radarsat and JERS-1) have been studied and compared. For HERMES mission, to make the satellite energy-efficient, a Sun-synchronous dusk-to-dawn orbit has been selected. Considering initial sensor parameters (e.g. swath width and look angle, specified by scientific objectives) a simulation was conducted using Satellite Tool Kit (STK) software. As a result, trying several options, we found out that at altitude 770 km and inclination 98.2 degrees the SAR antenna is able to cover whole Earth surface in 3 days (72 hours). The coverage is shown in figure below. Three different colors show satellite orbital paths within 3 days.



5. SCIENTIFIC PAYLOAD

THE HERMES L-BAND SYNTHETIC APERTURE RADAR (HLSAR)

The HERMES Synthetic Aperture Radar (HLSAR) is an active microwave sensor to be used day and night, independently from weather. As it uses the L-band, it is very well able to penetrate through the canopy. The sensor has an electronically steerable beam with variable swath width, which allows obtaining a wider swath than conventional SARs.




Observation Modes
Related to different swath widths and polarization methods, HLSAR has 3 observation modes, each of which provides specific functionality:

Specific	High resolution	Wide Swath	Polarimetry
Swathwidth	100 m	1000 m	HH, HV, VV, VH
Resolution	10 m	100 m	HH, HV, VV, VH
Swathwidth	100 m	1000 m	HH, HV, VV, VH
Resolution	10 m	100 m	HH, HV, VV, VH
Swathwidth	100 m	1000 m	HH, HV, VV, VH
Resolution	10 m	100 m	HH, HV, VV, VH

Technical Specifications


The HLSAR antenna dimensions are 10 m x 2.9 m. The off-nadir angle of HLSAR is variable between 7.2° and 51.4° (at mid-swath), corresponding to an 8 - 60.0° incidence angle range. The SAR signal can be created of single (HH or VV), dual (HH+VV or VV+VH) or quad (HH+HV+VV+VH) polarization.



6. POST-PROCESSING PRODUCTS

Reflectance Imaging

The sensor transmits a microwave signal to the earth surface. It then detects the energy of the received signal after it is scattered on the surface. As the signal is not transmitted in nadir direction, the more it is scattered the more energy the sensor receives (smooth surfaces like water or metal do not scatter but reflect). So water appears to be black and it can be very well distinguished from land.



Polarimetry

A radar signal reflected from an object generally changes its polarization, which is very sensitive to the surface of the reflecting material. By comparing the horizontal (H) and vertical (V) polarization of the reflected and the transmitted wave, the surface of the reflector can be analyzed in terms of polarized wave intensity and phase.

As HLSAR can acquire H and V for both sending and receiving signals (full polarimetric SAR), it has a high capability to detect water content in vegetation, monitoring of snow cover, condition of ice, flood monitoring and soil moisture.




Interferometry

HLSAR data provides the phase information of the received micro-waves, reflecting the distance between HLSAR and a target. Comparing the phases of two HLSAR signals acquired from different near points in orbit with known distance (Master, Slave), targeting the same area on ground, the elevation of the area can be computed. With this analysis method very precise elevation data can be derived (DTM).



7. SATELLITE BUS

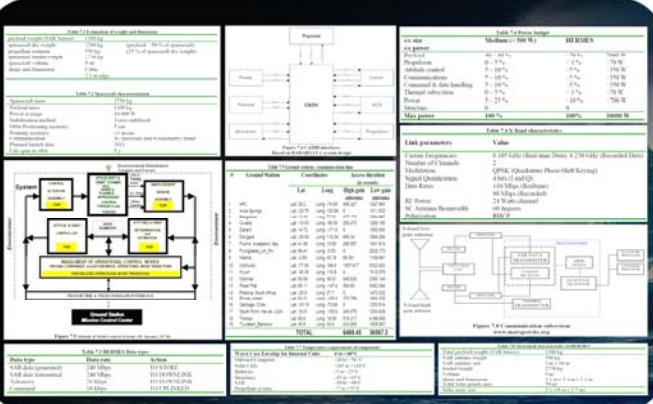

CONTACT US AT

ESPACE, Technische Universität München
Institut für Astronomische und Physikalische Geodäsie
Arcisstrasse 21, 80290 München, Germany

Emails:
Yunir Gataullin: yunir.gataullin@tum.de
Michael Dalmeier: dalmeier@gmx.de
Volker Tesmer: tesmer@dgfi.badw.de
Stavros Kotsiaros: kotsiarosstavros@yahoo.com
Agung Indrajit: agungindrajit@gmail.com

HERMES