



Nanoconfinement of LiBH₄ for High Ionic Conductivity in Lithium Ion Batteries

Lefevr, Jessica Emilia Avlina; Das, Supti; Blanchard, Didier

Published in:
ISPE-XV, Uppsala 15-19th August 2016

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Lefevr, J. E. A., Das, S., & Blanchard, D. (2016). Nanoconfinement of LiBH₄ for High Ionic Conductivity in Lithium Ion Batteries. In *ISPE-XV, Uppsala 15-19th August 2016* (pp. 177-177). [P52]

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Nanoconfinement of LiBH₄ for High Ionic Conductivity in Lithium Ion Batteries

Jessica Lefevre¹, Supti Das¹, Didier Blanchard¹

¹Department of Energy Conversion and Storage, Technical University of Denmark, Frederiksborgvej 399, DK-4000 Roskilde, Denmark.

jelef@dtu.dk

Efficient energy conversion and storage is crucial for development of systems based on renewable energy sources. For electricity storage, Li-ion batteries are commonly used in electronics devices but require many improvements to obtain longer life-time and higher energy densities. The current use of organic liquids and gels electrolytes limits these improvements because of lithium dendrites formation, reducing the lifetime of the battery and which can possibly be hazardous due to risks of short circuits.

An alternative to current state-of-art lithium-ion batteries could be solid-state batteries of higher stability and no risks of electrolyte leakage. LiBH₄ is a promising material for solid-state batteries as it is lightweight and stable electrochemically up to 5 V. Similar to other metal borohydrides, LiBH₄ exists in different polymorphs. While the orthorhombic phase (*Pnma*), stable at room temperature has a low ionic conductivity ($\sim 10^{-5}$ mS cm⁻¹ at 30 °C), the hexagonal phase (*P63/mmc*), stable above 110 °C, has a much higher ionic conductivity (~ 1 mS cm⁻¹ at 120°) [1]. Confinement of LiBH₄ in mesoporous SiO₂ allows obtaining fast ionic conductivity even at room temperature. Figure 1 shows Arrhenius plot of ionic conductivities of bulk LiBH₄ and nanoconfined SiO₂. For LiBH₄ the clear increase of the conductivity at 110 °C is due to the phase transition.

The origin of the high ionic conductivity in the nanoconfined LiBH₄ is due to an interfacial layer created between the borohydride and the walls of the SiO₂ pores. Better knowledge of the mechanisms behind the formation of this interface as well as the effect of the mesoporous SiO₂ structure parameters (pore size, surface area,...) are crucial for improving even further the ionic conductivity of the low temperature solid electrolytes to be use in solid-sate lithium ion batteries.

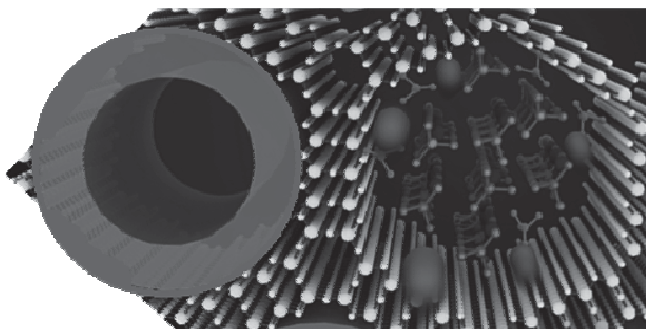


Figure 1. Nanoconfined LiBH₄ in SiO₂ scaffold [1]

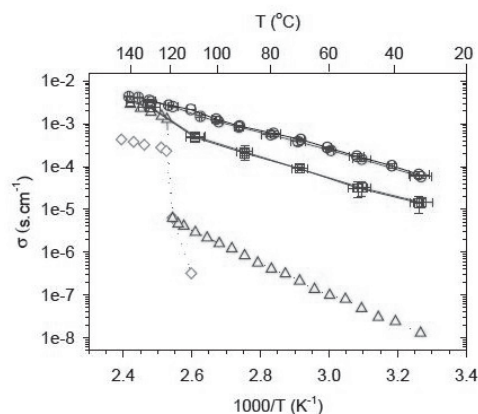


Figure 2. Arrhenius Plot of bulk LiBH₄ (red triangles), SiO₂ - LiBH₄ nanocomposites (circles and squares) and physical mixtures (green diamonds). Red symbols indicate measurements taken during heating and blue during cooling [1]

References

- [1] D. Blanchard, A. Nale, D. Sveinbjörnsson, T. M. Eggenhuisen, M. H. W. Verkuijlen, Suwarno, T. Vegge, A. P. M. Kentgens, P. E. de Jongh, (2015) Nanoconfined LiBH₄ as a Fast Lithium Ion Conductor. *Adv. Funct. Mater.* 25, 184 (2015).