

Geometrical tuning of nanoscale split-ring resonators

Claus Jeppesen, Anders Kristensen

Department of Micro- and Nanotechnology, DTU Nanotech, Technical University of Denmark, DK-2800 Kongens Lyngby, Denmark
Corresponding author: anders.kristensen@nanotech.dtu.dk; Phone: +45- 4525 6331, Fax: +45- 4588 7762

Sanshui Xiao, N. Asger Mortensen,

Department of Photonics Engineering, DTU Fotonik, Technical University of Denmark, DK-2800 Kongens Lyngby, Denmark

Abstract: We investigate the capacitance tuning of nanoscale split-ring resonators. An LC -model predicts a simple dependence of resonance frequency on slit aspect ratio. Experimental and numerical data follow the predictions of the LC -model.

© 2010 Optical Society of America

OCIS codes: (160.3918) Metamaterials, (250.5403) Plasmonics

1. Introduction

Metamaterials are artificially structured materials with exceptional optical properties inherited from the structure of the sub-wavelength, mesoscopic unit-cell. Designing negative index materials with simultaneously negative permittivity ϵ as well as a negative permeability μ is one of the promising aspects of metamaterials. Since a negative electric response is common in metals at e.g. optical frequencies, the search has primarily focused on designing structures with a negative magnetic response. Different types of split-ring resonator (SRR) geometries [1–3] are particularly central in this context and have been realized at Terahertz [1, 4] to visible frequencies [3, 5]. The analogy with inductor-capacitor (LC) circuits have motivated considerable efforts in establishing simple circuit models, allowing for an estimate of the resonance frequency $\omega_0 = 1/\sqrt{LC}$ in terms of geometrical parameters of the split-ring resonator structure, see. e.g. Refs. [6–7] and references therein. The LC -model has proven to be a good approximation as long as the coupling response of the SRR array is small compared to the response of a single SRR, hence the period Λ has to be sufficiently large [8]. Tuning of the resonance has been accomplished by scaling of a single geometrical dimension [9], linear scaling of all SRR dimensions [5], and finally by altering the cladding [10].

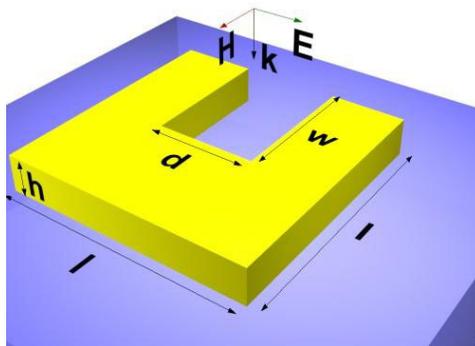


Figure 1. Schematic drawing of the split-ring resonator design, indicating central geometrical parameters as well as the polarization configuration of the excitation.

In this paper, the influence on resonance frequency of geometrical scaling of split-ring resonators is studied experimentally and by means of full-wave numerical simulations. The SRRs are placed in a periodic array keeping the period constant and large, $\Lambda=500$ nm, to minimize coupling effects. The system is described by an LC -model [7]. The model predicts a data collapse, which is experimentally verified.

$$(k_0 l)^2 \sim d/w \quad (1)$$

where k_0 is the free-space wave number, l is the side length, d is the slit width, w is the slit length, see Fig. 1.

2. Results

The LC-model is compared to experimental and numerical simulation data. Full-wave simulations were performed in CST Microwave Studios. The numerical data in Fig. 2(b) are calculated for a structure with $l=200$ nm, $d=80$ nm, $h=30$ nm, $\Lambda=440$ nm. The numerical data support the predicted linear scaling of the LC-model.

For the experimental investigations, 8 samples with 2 mm by 2 mm arrays of gold SRRs were fabricated on glass substrates by electron beam lithography and lift-off [7], see Fig. 2(a). The geometrical parameters of the samples covered: $d=80$ nm, $w=90$ -110 nm, $l=200$ nm, $h=35$ nm.

The transmission was measured using a 1 mm diameter laser spot, thus effectively probing an ensemble of 10^8 - 10^9 SRRs. The experimental data are fitted to the LC-model in Fig. 2(b), using $k=2\pi/\lambda$, where λ is the measured resonance wavelength λ , and the split ring dimensions d , l , w are measured by SEM inspections.

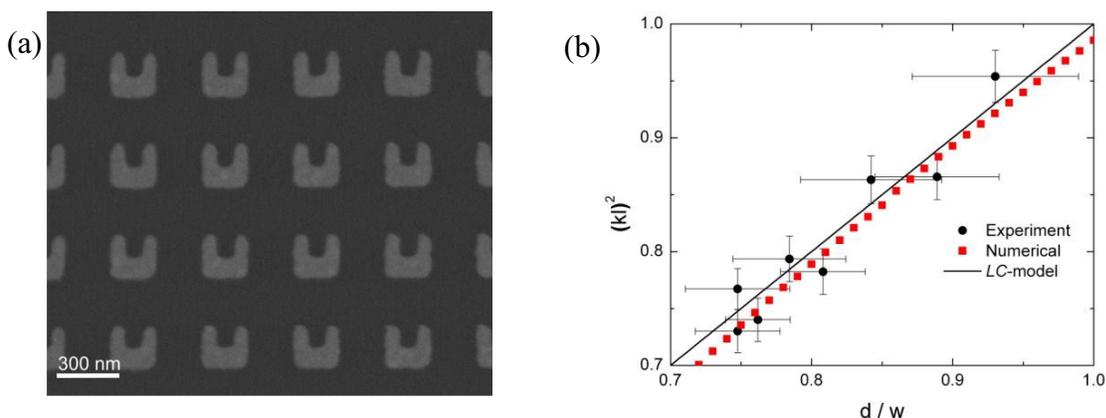


Figure 2. (a) Micrograph of a SRR array with pitch $\Lambda = 440$ nm. This sample has $l = 200$ nm, $w = 95$ nm, $d = 80$ nm, and $h = 35$ nm. (b) Plot of $(k_0 l)^2$ versus d/w where experimental and numerical data are plotted together with the LC-model. The x-error bars on the experimental data represent the standard deviation (SD) of ten individual measurements of w , and d added together. The y-error bars are the 1 nm spectral resolution of the Ando AQ-6315E Optical Spectrum Analyzer added to the SD of ten measurements of the length.

In conclusion, we have fabricated periodic arrays of subwavelength, nanoscale split-ring resonators to investigate geometrical tuning. Our key observation is that the experimental and numerical data follow the predictions of the LC-model.

- [1] T. J. Yen, W. J. Padilla, N. Fang, D. C. Vier, D. R. Smith, J. B. Pendry, D. N. Basov, and X. Zhang, "Terahertz magnetic response from artificial materials", *Science* **303**, 1494 (2004).
- [2] N. Katsarakis, G. Konstantinidis, A. Kostopoulos, R. S. Penciu, T. F. Gundogdu, M. Kafesaki, E. N. Economou, T. Koschny, and C. M. Soukoulis, "Magnetic response of split-ring resonators in the far-infrared frequency regime", *Opt. Lett.* **30**, 1348 (2005).
- [3] C. Enkrich, M. Wegener, S. Linden, S. Burger, L. Zschiedrich, F. Schmidt, J. F. Zhou, T. Koschny, and C. M. Soukoulis, "Magnetic Metamaterials at Telecommunication and Visible Frequencies", *Phys. Rev. Lett.* **95**, 203901 (2005).
- [4] S. Linden, C. Enkrich, M. Wegener, J. F. Zhou, T. Koschny, and C. M. Soukoulis, "Magnetic response of metamaterials at 100 terahertz", *Science* **306**, 1351 (2004).
- [5] M. W. Klein, C. Enkrich, M. Wegener, C. M. Soukoulis, and S. Linden, "Single-slit split-ring resonators at optical frequencies: limits of size scaling", *Opt. Lett.* **31**, 1259 (2006).
- [6] T. D. Corrigan, P. W. Kolb, A. B. Sushkov, H. D. Drew, D. C. Schmadel, and R. J. Phaneuf, "Optical plasmonic resonances in split-ring resonator structures: an improved LC model", *Opt. Express* **16**, 19850 (2008).
- [7] C. Jeppesen, N. A. Mortensen, and A. Kristensen, "Capacitance tuning of nanoscale split-ring resonators", *Appl. Phys. Lett.* **95**, 1931084 (2009).
- [8] B. Kante, A. de Lustrac, and J. M. Lourtioz, "In-plane coupling and field enhancement in infrared metamaterial surfaces", *Phys. Rev. B* **80** (2009).
- [9] K. Aydin, I. Bulu, K. Guven, M. Kafesaki, C. M. Soukoulis, and E. Ozbay, "Investigation of magnetic resonances for different split-ring resonator parameters and designs", *New J. Phys.* **7**, 1367 (2005).
- [10] Y. Sun, X. Xia, H. Feng, H. Yang, C. Gu, and L. Wang, "Modulated terahertz responses of split ring resonators by nanometer thick liquid layers", *Appl. Phys. Lett.* **92** (2008).