



Drivers of flood damage on event level

Kreibich, H.; Aerts, J. C. J. H.; Apel, H.; Arnbjerg-Nielsen, Karsten; Baldassarre, G. Di; Bouwer, L. M.; Bubeck, Ph.; Caloiero, T.; Cortes, M.; Do, Ch.; Gain, A. K.; Giampa, V.; Kuhlicke, Ch.; Kundewicz, Z. W.; Llasat, M. C.; Mård, J.; Matczak, P.; Mazzoleni, M.; Molinari, D.; Nguyen, V. D.; Petrucci, O.; Schröter, K.; Slager, K.; Thieken, A. H.; Vorogushyn, S.; Merz, B.

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Kreibich, H., Aerts, J. C. J. H., Apel, H., Arnbjerg-Nielsen, K., Baldassarre, G. D., Bouwer, L. M., ... Merz, B. (2016). Drivers of flood damage on event level. Poster session presented at EGU General Assembly 2016, Vienna, Austria.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

GFZ Drivers of flood damage on event level

Helmholtz Centre Potsdam IAHS Panta Rhei Working group "Changes in Flood Risk" *

H. Kreibich, J.C.J.H. Aerts, H. Apel, K. Arnbjerg-Nielsen, G. Di Baldassarre, L.M. Bouwer, Ph. Bubeck, T. Caloiero, M. Cortés, Ch. Do, A.K. Gain, V. Giampà, Ch. Kuhlicke, Z.W. Kundzewicz, M.C. Llasat, J. Mård, P. Matczak, M. Mazzoleni, D. Molinari, V.D. Nguyen, O. Petrucci, K. Schröter, K. Stager, A.H. Thieken, S. Vorogushyn, B. Merz

* For more information on the working group see: <http://iahs.info/uploads/Panta%20Rhei/Working%20Groups/wg19.pdf> or contact the coordinator Heidi Kreibich (Heidi.Kreibich@gfz-potsdam.de), German Research Centre for Geosciences GFZ, Section 5.4 Hydrology, Potsdam, Germany



HELMHOLTZ CENTRE POTSDAM
GFZ GERMAN RESEARCH CENTRE FOR GEOSCIENCES

Poster-
EGU2016-12398

Background and Objective

Flood risk is dynamic and influenced by many processes related to hazard, exposure and vulnerability. Flood damage increased significantly over the past decades, however, resulting overall economic loss per event is an aggregated indicator and it is difficult to attribute causes to this increasing trend.

Much has been learned about damaging processes during floods at the micro-scale, e.g. building level. However, little is known about the main factors determining the amount of flood damage on event level.

Thus, we analyse and compare paired flood events, i.e. consecutive, similarly damaging floods that occurred in the same area. In analogy to 'Paired catchment studies' - a well-established method in hydrology to understand how changes in land use affect streamflow - we will investigate how and why resulting flood damage in a region differed between the first and second consecutive flood events.



Figure 1: What drives the damage on event level? Example: June 2013 flood in Germany

Approach

A meta-study approach is followed by undertaking mainly qualitative analyses of nine paired flood event studies (Figure 7). The theoretical foundation of our analyses is the IPCC SREX concept of disaster risk (Figure 2), thus for all case studies quantitative to qualitative indicators for hazard, exposure and vulnerability are developed and compared (Tables 1 and 2).

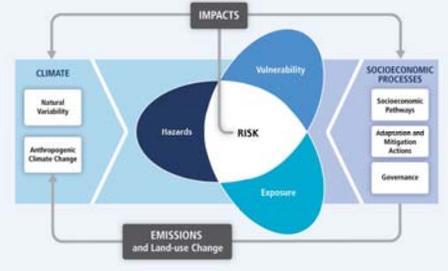


Figure 2: Analyses follow the IPCC SREX concept of disaster risk (Kundzewicz et al. 2014).

References:
DKKV (Deutsches Komitee Katastrophenvorsorge e.V.) (2015) Das Hochwasser im Juni 2013: Bewährungsprobe für das Hochwasserrisikomanagement in Deutschland. Schriftenreihe des DKKV; 53. Bonn, DKKV.
Kundzewicz et al. (2014) Flood risk and climate change: global and regional perspectives. Hydrological Sciences Journal, 59(1), 1-28
Merz, B., Elmer, F., Kurz, M., Mühr, B., Schröder, K., Uhlmann-Elmer, S. (2014) The extreme flood in June 2013 in Germany. *Houille Blanche - Revue internationale de l'eau*, 1, p. 5-10
Schröder, K., Kurz, M., Elmer, F., Mühr, B., Merz, B. (2015) What made the June 2013 flood in Germany an exceptional event? A hydro-meteorological evaluation. - Hydrology and Earth System Sciences, 19, 309-327
Thieken, A.H., T. Bessel, S. Kienzer, H. Kreibich, M. Müller, S. Piel, K. Schröter (2016) The flood of June 2013 in Germany: how much do we know about its impacts? Nat. Hazards Earth Syst. Sci. Discuss., doi:10.5194/nhess-2016-324

www.gfz-potsdam.de

Example: Paired flood events - 2002 and 2013 floods in Germany

In August 2002 severe flooding occurred in the Elbe and Danube catchments. In Germany, the flood of August 2002 caused 21 fatalities and 108 injured people as well as overall financial losses of EUR 11,600 million (Figure 3).
The flood in June 2013 caused large-scale flooding affecting almost all main river basins in Germany (Merz et al. 2014; Schröter et al. 2015). The flood caused 14 dead and 128 injured people. The overall financial losses are estimated to be EUR 6,000 million (Thieken et al. 2016).

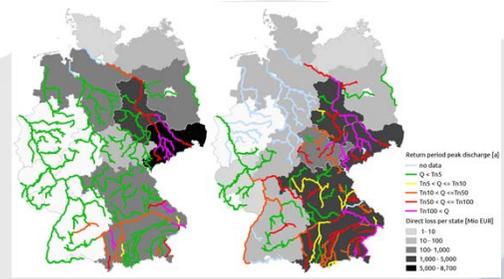


Figure 3 Overview of the 2002 (left) and 2013 (right) flood events in respect to return periods and resulting losses

Table 1: Semi-quantitative comparison of the paired flood events: 2002 and 2013 floods in the Elbe and Danube catchments in Germany

	2002 flood	2013 flood
Hazard	Pre-conditions (Schröter et al. 2015): Precipitation (Schroter et al. 2015): Hydrological severity (Schroter et al. 2015): Protection failures: 131 dike failures	Wetnessindex: 47 Precipitationindex: 30 Severityindex: 35 Severityindex: 7 30 dike failures including 3 major breaches
Exposure	Number of people affected: Settlement area affected: Exposure hotspots	600,000 No data No data
Vulnerability	Awareness: Preparedness: Organisational emergency management	Several consecutive floods in Elbe and Danube catchments since 2002, but hazard and risk maps are hardly known by the public. Warnings were relatively late and imprecise, administration as well as affected people and companies were not well prepared for emergency management Exercises within individual relief organisations

A detailed comparison of the two consecutive flood events in terms of hazard, exposure and vulnerability (DKKV 2015) revealed that affected parties and authorities learned due to the extreme flood in 2002, and that considerable improvements are achieved, in particular in:
1) increased flood prevention by improved spatial planning,
2) increased number of property-level mitigation measures,
3) more effective early warning and improved coordination of disaster response
4) targeted maintenance of flood defence systems and their deliberate relocation.

Examples of detailed comparisons focused on companies

Figures 4 to 6 show examples of detailed comparisons between the 2002 and 2013 floods in Germany focused on companies damage and warning (DKKV 2015). Results are based on surveys undertaken after both flood events. Several of such analyses were used to develop and underpin the semi-quantitative indicators for Tables 1 and 2.

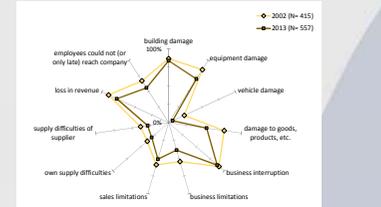


Figure 4: Fractions of companies affected by different types of damage

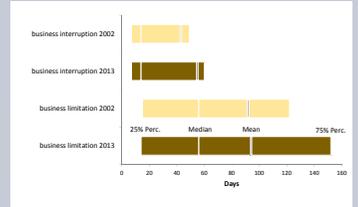


Figure 5 Duration of business interruption and business limitation of companies

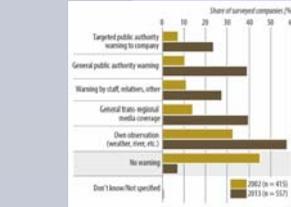


Figure 6 Overview of how companies became aware of the imminent flood danger

Case studies: Paired flood events



Figure 7 Overview of paired flood event studies (years of flood occurrences, catchments, country)

Pattern of paired flood event studies

Table 2: Qualitative comparison of the paired flood events. Importance of potential damage drivers in the paired flood events (D = Germany; P = Poland; I = Italy; C = Catalonia/Spain; M = Mexico; V = Vietnam; B = Bangladesh; Mz = Mozambique; damage reducing effect: green, neutral/common effect: gray, damage increasing effect: red; high damage reduction: 11, medium damage reduction: 1, no damage reduction: -)

	2002	2013	1993	1995	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	
Hazard																						
precipitation																						
hydrological severity																						
Protection failures																						
Exposure																						
Number of people affected																						
Settlement area affected																						
Exposure hotspots																						
Vulnerability																						
Preparedness																						
Organisational emergency management																						
Damage reduction																						

Conclusions

- In nearly all cases of consecutive floods, there is a clear reduction in damage. This seems to be mainly related to decreasing vulnerability.
- Paired flood event studies show large decreases in vulnerability, medium reductions in damage and small changes in exposure from first to second event.
- > Societies seem to learn
- Paired flood event studies offer potential for understanding changes in flood risk systems, however, case studies show that influences are various and selection of studies may be biased.