



## Screening the electrochemical activity of transition metal nanoparticles for SOFC anode infiltration

Drasbæk, Daniel Bøgh; Traulsen, Marie Lund; Walker, Robert ; Holtappels, Peter

*Publication date:*  
2017

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Drasbæk, D. B., Traulsen, M. L., Walker, R., & Holtappels, P. (2017). *Screening the electrochemical activity of transition metal nanoparticles for SOFC anode infiltration*. Abstract from 11th International Symposium on Electrochemical Impedance Analysis (EIA 2017), Camogli, Genova, Italy.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## Screening the electrochemical activity of transition metal nanoparticles for SOFC anode infiltration

Daniel Bøgh Drasbæk<sup>1,\*</sup>, Marie Lund Traulsen<sup>1</sup>, Robert A. Walker<sup>2</sup> and Peter Holtappels<sup>1</sup>

<sup>1</sup>Department of Energy Conversion and Storage, Technical University of Denmark, DTU Risø Campus, Frederiksborgvej 399, 4000 Roskilde, Denmark

<sup>2</sup>Walker Research Group, Chemistry & Biochemistry, Montana State University P.O. Box 173400 Bozeman, MT

\*e-mail: dadr@dtu.dk

Solid oxide fuel cells (SOFCs) are high temperature electrochemical devices that convert the energy released by a chemical reaction directly into electrical energy. Conventional SOFCs use a Nickel Yttria-doped Zirconia cermet (Ni/YSZ) as anodes. These nickel-based SOFC anodes are effective electrocatalysts for simple fuels such as H<sub>2</sub> or natural gas, but they are also susceptible to degradation due to redox cycling, coking from carbon accumulation and poisoning by impurities such as sulphur in the fuel gas. Other materials such as donor-doped SrTiO<sub>3</sub>, like Nb-doped SrTiO<sub>3</sub> (STN) are promising candidates to overcome some of these limitations, since these ceramic perovskites are tolerant to carbon, and sulphur containing atmospheres, have a high electronic conductivity and are highly redox stable. However, STN is a very poor electrocatalyst for fuel oxidation and therefore STN must be infiltrated with electrocatalysts in order to become effective electrodes in SOFC applications.

In this work, we report the first steps in a screening process, where the electrocatalytic activities of some transition metals like Ni, Co, Mo, Fe, Cu and W are investigated after they have been infiltrated as nanoparticles into STN94/YSZ symmetrical cells. The electrochemical activity of the nanoparticles are analyzed using electrochemical impedance spectroscopy (EIS) at open circuit voltage (OCV) under different gas atmospheres and temperatures. EIS data are correlated directly with *operando* Raman spectroscopy measurements that report on the real-time material composition of the STN infiltrated electrodes under polarization. Additional analysis by scanning electron microscopy on samples before and after testing showed how electrode structure devolved during the tests. The combination of *operando* Raman spectroscopy and EIS analysis was used to correlate changes in the impedance response to changes in the surface chemistry as in FIG.1 and to clarify differences in coking behavior between the nickel and cobalt infiltrated STN.

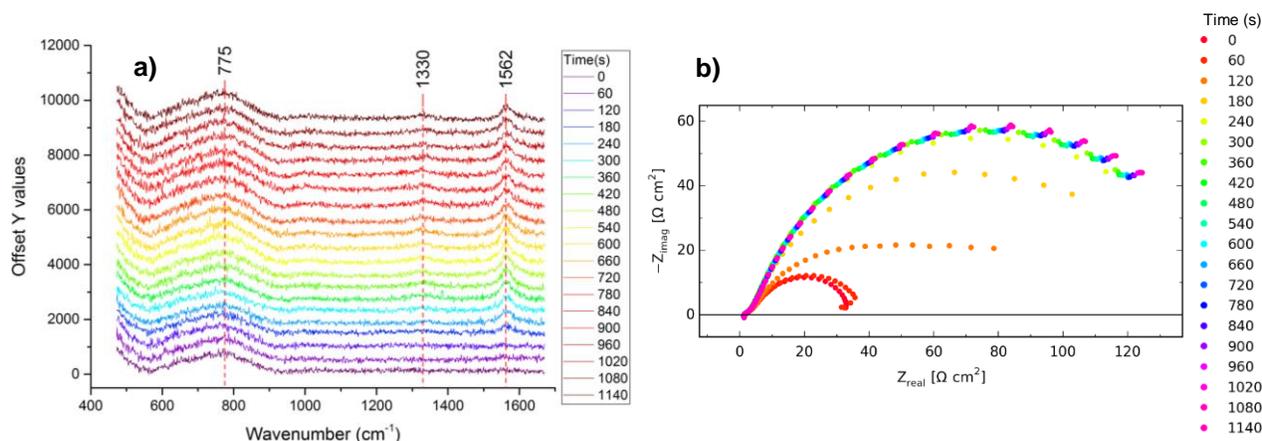


FIG.1. The response of a nickel infiltrated STN symmetrical cell to changing the atmosphere from 3% H<sub>2</sub>O/H<sub>2</sub> to pure CH<sub>4</sub>  
a) The Raman signal and b) the impedance respond.